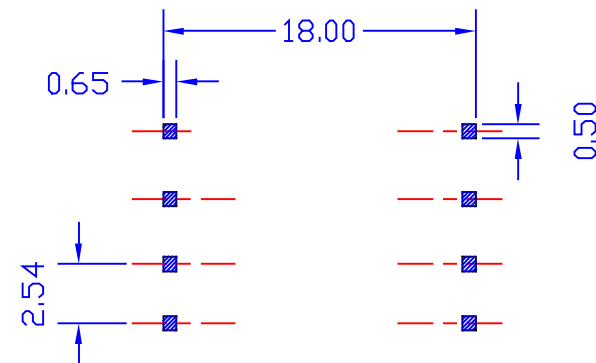
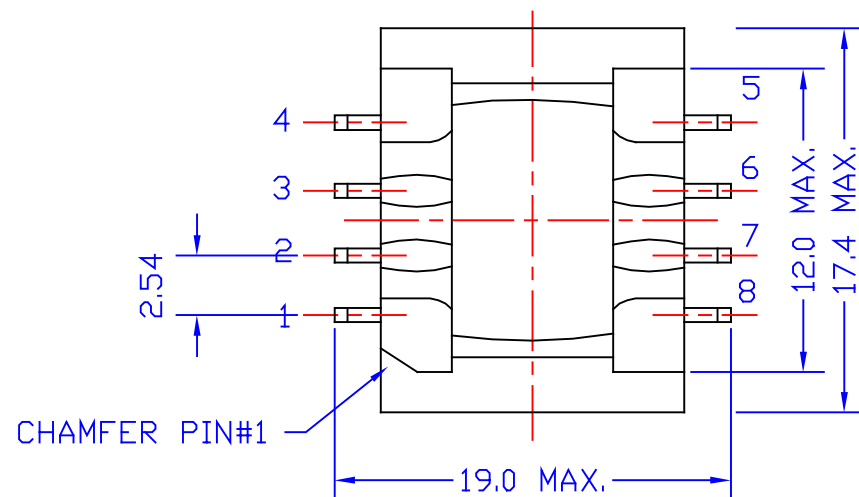
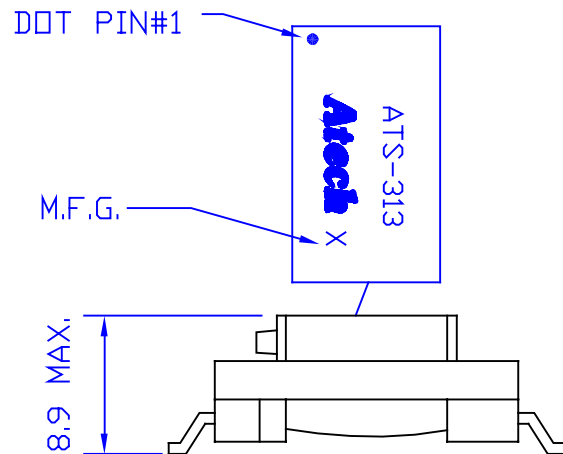


ELECTRICAL CHARACTERISTICS: <FOR V.90 , MEET UL1950>

1. D.C.R. : PIN 1-4 = 100 OHM+/-10% PIN 5-8 = 122 OHM+/-10%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL) : PIN 1-4 = 12H MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, 5-8 W/H 392 OHM) : PIN 1-4 = 600 OHM+/-5%
4. INSERTION LOSS (@1KHZ, 0dBm, 5-8 W/H 392 OHM) : 2dB TYP.
5. FREQ. RESP. (REF. 1KHZ) : 200 TO 4KHZ = +/-0.1dB
6. RETURN LOSS (REF. 600 OHM) : 300 TO 3.5KHZ = 20dB MIN.
7. TURNS RATIO (@9KHZ, 0.1Vrms) : PIN 8-5 : PIN 1-4 = 1+/-1%
8. LONGITUDINAL BALANCE : 200 TO 4KHZ = 65dB MIN.
9. THD (@600HZ, -10dBm) : -86dB MAX.
10. HI-PDT (@1650VAC, 1mA, 1SEC) : PIN 1-8
11. LEAD-FREE

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6687 FAX:(02)2794-8004	TITLE 600i 392 TRANSFORMER	
							DWG. NO. ATS-313AN	
	RELEASE	05/27 /2004	BART	KEVIN	SUEDY	UNITS: M/M	SAFETY CRC.0137	SHEET1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						05/27/04		