
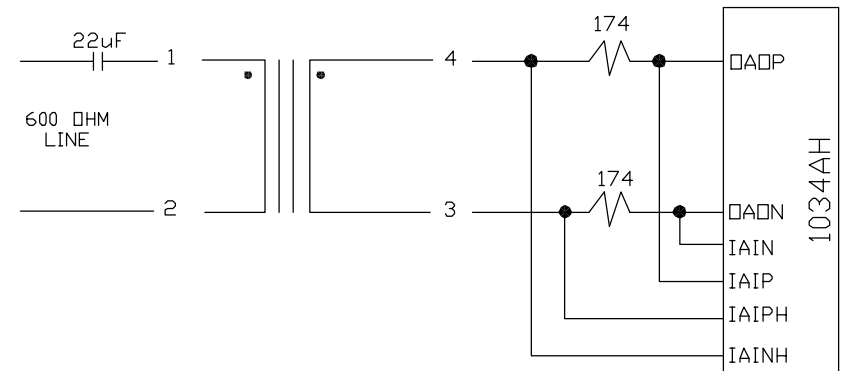
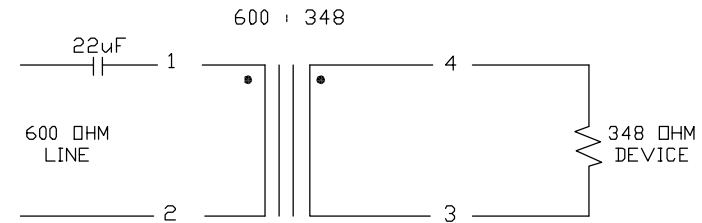
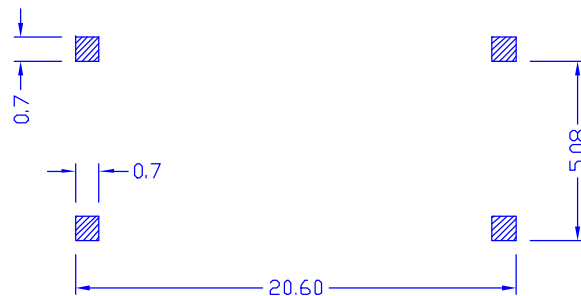


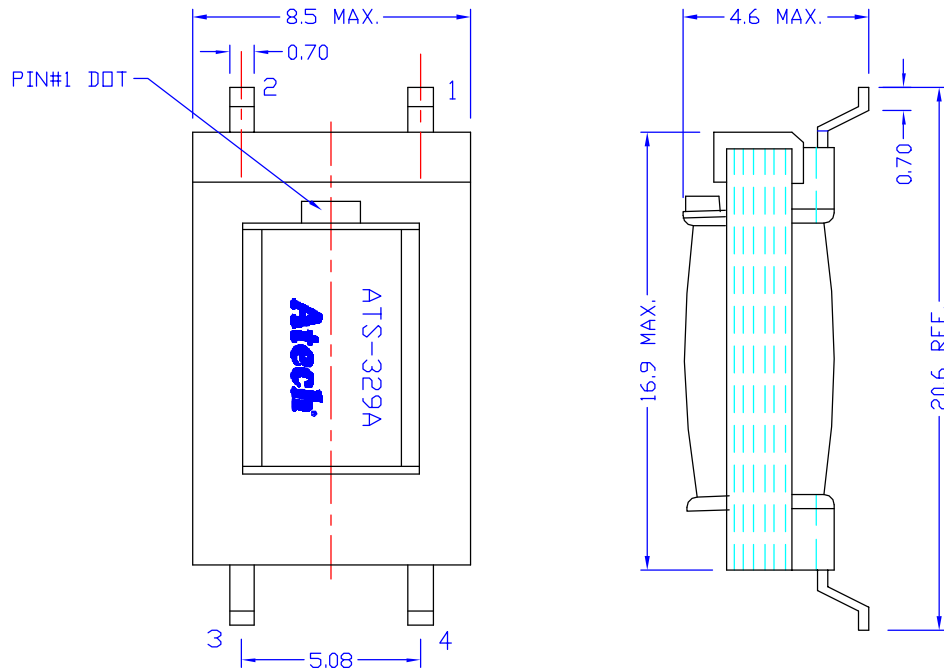

ELECTRICAL CHARACTERISTICS :

(FOR 1034AH V.90, MEET IEC 950)

- D.C.R. : PIN 1-2 = 135 Ohm MAX.
PIN 3-4 = 160 Ohm MAX.
- INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.5Hy MIN.
- INSERTION LOSS (@1KHZ, 0dBm) : PIN 1-2 = 3.0dB MAX.
- FREQ. RESP. (REF. 1KHZ) : @200HZ-4KHZ = ± 0.15 dB
- RETURN LOSS (REF. 600 Ohm) : @200HZ = 30dB MIN.
@1KHZ = 30dB MIN.
@4KHZ = 20dB MIN.
- URNS RATIO : PIN 1-2 : PIN 4-3 = $1 \pm 1\%$
- LONGITUDINAL BAL. = 60dB MIN. (@200-4KHZ)
- T.H.D. (@600HZ, -10dBm) = -78dB MAX.
- HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

D	ERASE CRC0127	08/16/2005	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	1034AH TRANSFORMER
C	600 : 348	12/19/2002	DOLLY	AL	SUEDY		DWG. NO.	ATS-329A
B	ADD BART NO.	06/30/99	PAIR		SUEDY			
	RELEASE	11/27/98	PAIR		SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE		DRAW Pair
						11/27/98		