

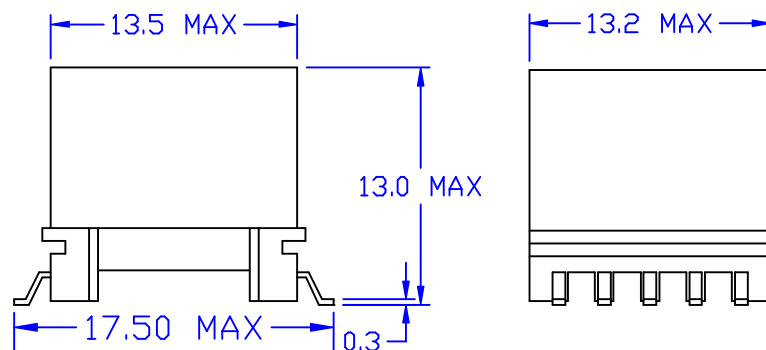
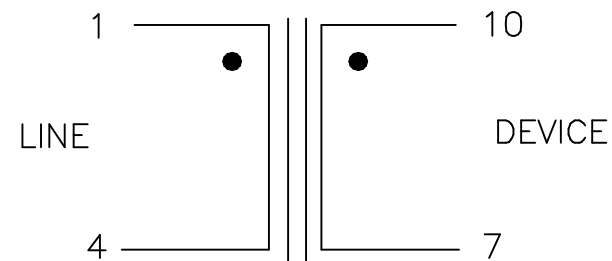


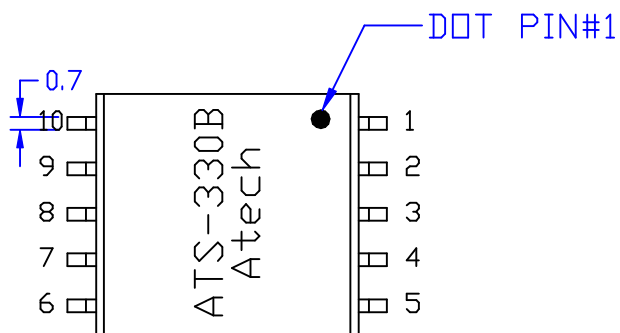

ELECTRICAL CHARACTERISTICS : <MEET UL 1950, IEC-950,B2204 COMPATIBLE>

1. D.C.R. : PIN 1-4 = 2.83 OHM $\pm$ 12%
PIN 10-7 = 0.7 OHM $\pm$ 12%
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 = 1.51mH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (W/H 10-7 SHORT) = 20 uH MAX.
4. Cw (@100KHZ, 0.1Vrms) PIN 1-10 = 35pF MAX.
5. TURN RATIO (@530KHZ, 1Vrms) : 1-4 : 10-7 = 1.426 $\pm$ 1%
6. HI-POT (@1800 VAC, 1mA, 2SEC.) : PIN 1-10

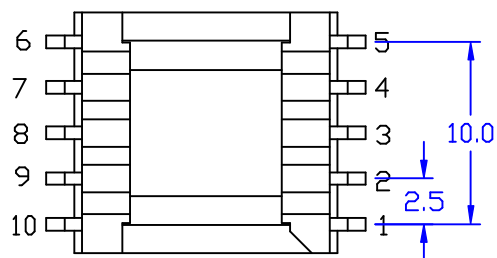

						Atech [®]		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6867 FAX:(02)2794-8004		ATS-330B	
RELEASE		08/23/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						08/23/01		DRAW Pair	