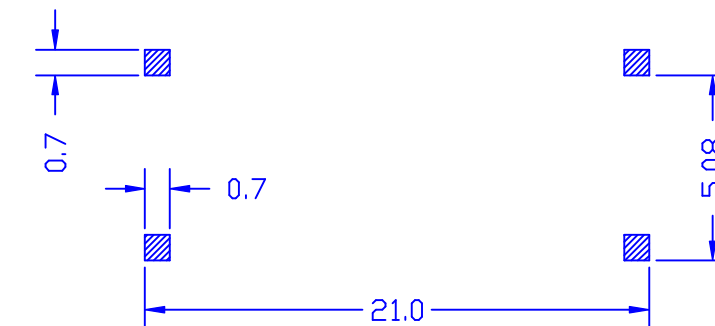


1. D.C.R. : PIN 1-2 = 170 OHM $\pm$ 12% PIN 3-4 = 150 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.3Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 OHM)
PIN 1-2 = 3.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = $\pm$ 0.1dB
5. RETURN LOSS (REF. 600 OHM) : @ 200HZ - 4KHZ = 23dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm$ 1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ,-10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6867 FAX:(02)2794-8004	TITLE 600 : 287 TRANSFORMER		
B	DELETE N & DATE CODE	01/17/2001	PAIR		SUEDY			DWG. NO. ATS-348AD	
A	ADD FACTORY ID	10/07/00	PAIR		SUEDY				
	RELEASE	08/11/00	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						08/11/00		Pair	