
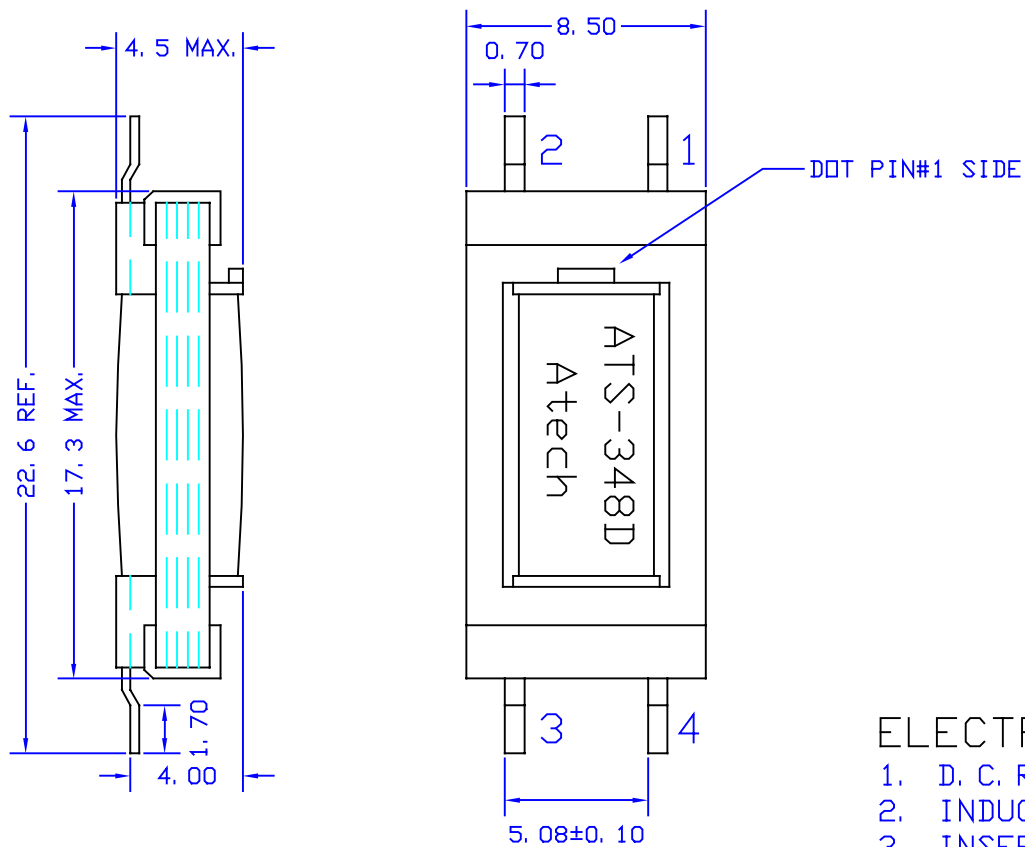


ELECTRICAL CHARACTERISTICS: (FOR V. 90, MEET UL1950)

1. D. C. R. : PIN 1-2 = 170 OHM $\pm 12\%$ PIN3-4 = 150 OHM $\pm 12\%$
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.3Hy MIN.
3. INSERTION LOSS (@1KHZ, 0dBm, PIN 3-4 W/H 287 OHM)
PIN 1-2 = 3.5dB MAX.
4. FREQ. RESP. (REF. 1KHZ) : 200HZ-4KHZ = ± 0.1 dB
5. RETURN LOSS (REF. 600 OHM) : @200HZ - 4KHZ = 23dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN 4-3 = $1 \pm 1\%$
7. LONGITUDINAL BAL. = 60dB MIN. (@200-4KHZ)
8. T. H. D. (@600HZ, -10dBm) = -80dB TYP.
9. HI-POT (@1650VAC. 1mA, 2SEC.) PRI. -SEC.

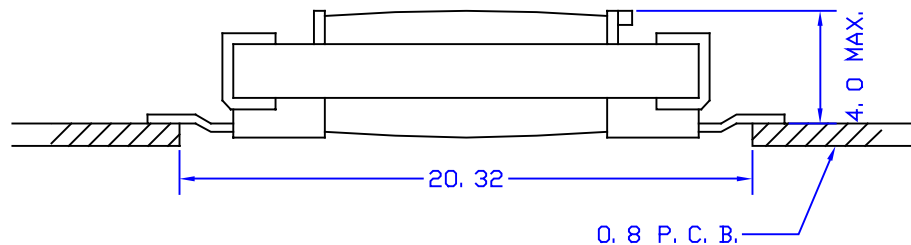

						Atech®		TITLE 600 : 287 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL: (02) 2794-8887 FAX: (02) 2794-8004		ATS-348D	
RELEASE		05/10/00	RORY	SUEY		UNITS:		SAFETY	
NO.		DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						05/10/00		Pair	