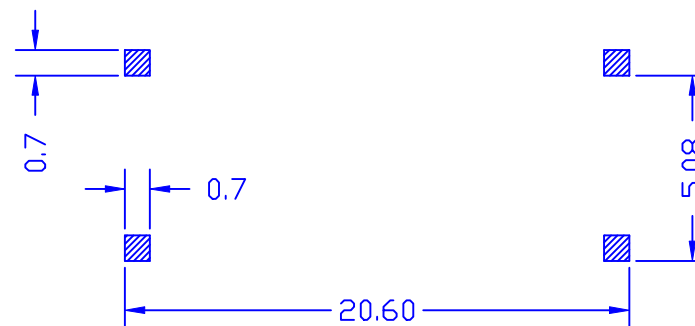
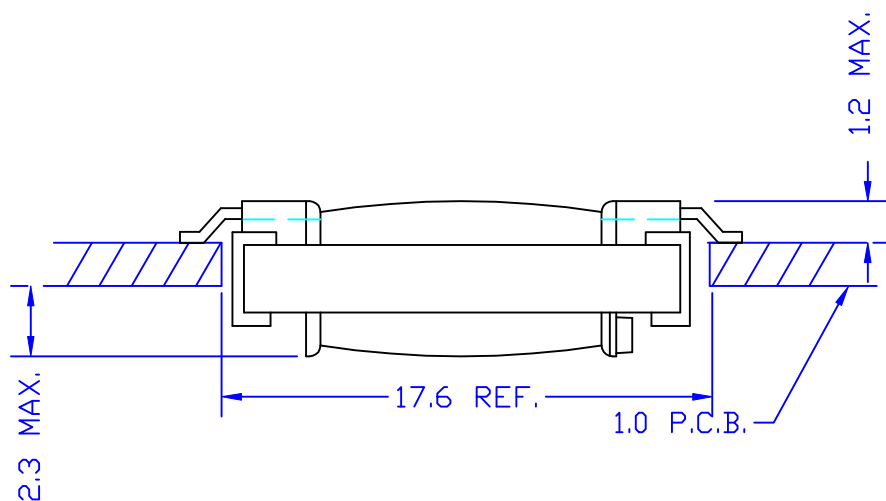
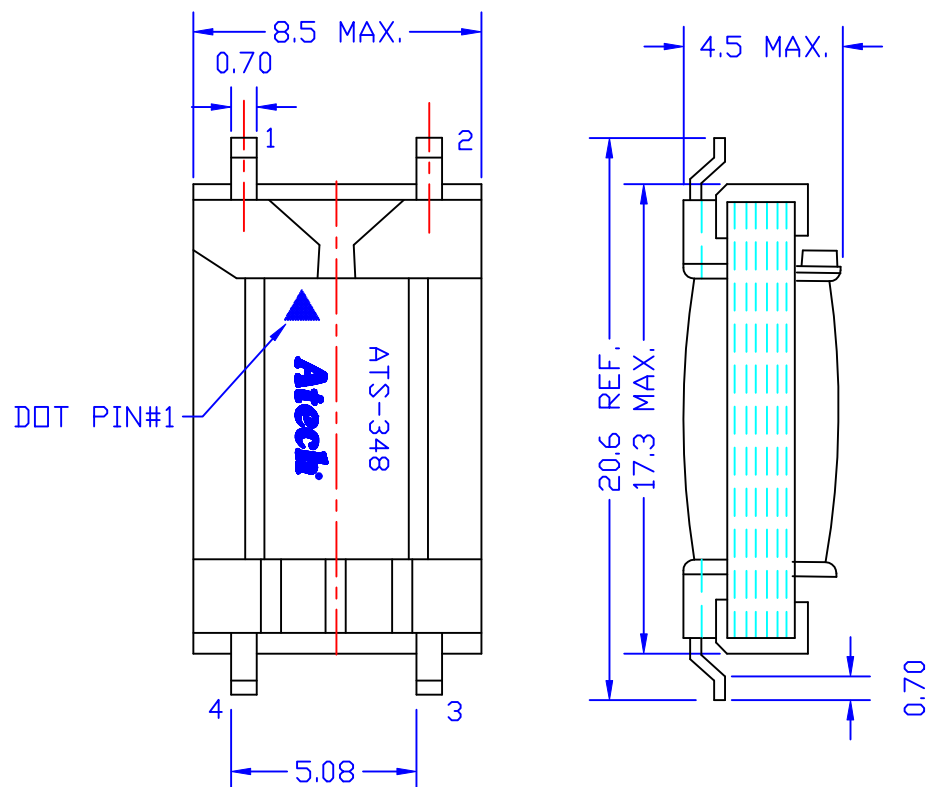


ELECTRICAL CHARACTERISTICS: (FOR V.90, MEET UL1950)

1. D.C.R. : PIN 1-2 = 104 OHM $\pm$ 12% PIN 3-4 = 97 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 1.25Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 432 OHM)
PIN 1-2 = 2.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = $\pm$ 0.3dB
5. RETURN LOSS (REF. 600 OHM) : @ 200HZ - 4KHZ = 20dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm$ 1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ,-10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 432 TRANSFORMER	
								DWG. NO. ATS-348S	
A	DCR	08/15/00	FENG		SUEDY	UNITS: M/M		SAFETY	
	RELEASE	08/15/00	PAIR		SUEDY	DATE			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	08/15/00		SHEET 1 of 1	
REVISIONS								DRAW <i>Pair</i>	