

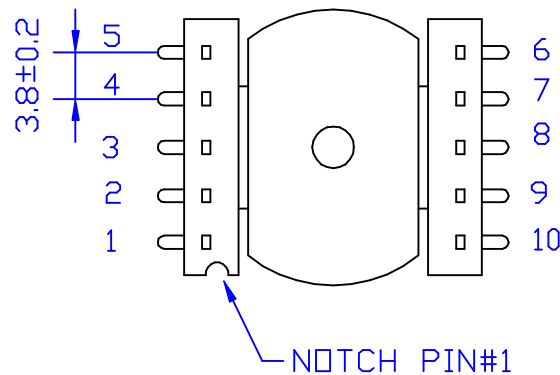
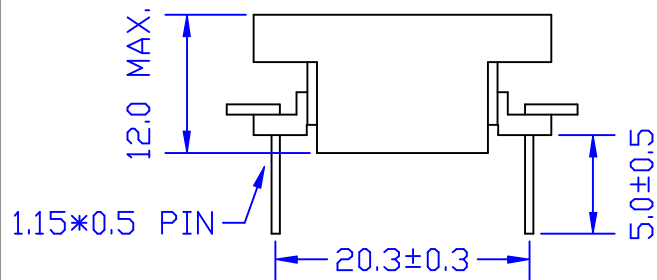


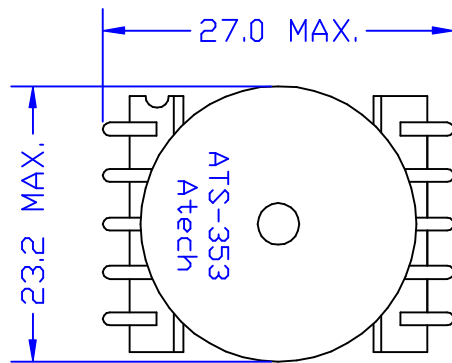

1CT : 1.8SPLIT

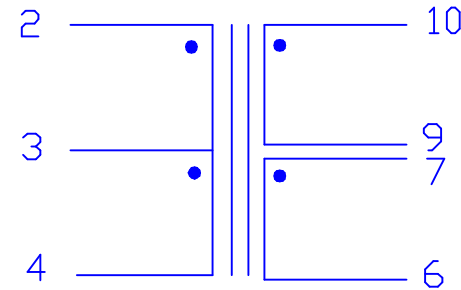

ELECTRICAL CHARACTERISTICS : (FOR LEVEL ONE SK70740/SK70741/
SK70742 HDL2 CHIPSET)

1. DCR : PIN 2-4 = 6-7 = 9-10 = 2 OHM MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms, 9-7 SHORT) : PIN 6-10 = 2.06 mH $\pm$ 6%
3. LEAKAGE INDUCTANCE (@10KHz, 0.1Vrms) 7-9 , 4-2 SHORT PIN6-10=15uH MAX.
4. INTERWINDING CAP (@10KHz, 0.1Vrms) 7-9 SHORT PIN 2-10 =40pF MAX.
5. TURN RATIO (@100KHz, 1Vrms, 7-9 SHORT) : PIN 10-6 : PIN 2-4 = 1.79 $\pm$ 1%
6. HI-POT (@2500VAC, 1mA, 2SEC 7-9 SHORT) 2-10

					Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE HDSL TRANSFORMER			
B	TOLERANCE	05/16/2003	RORY	AL		SUEDY	DWG. NO. ATS-353		
A	CHANGE SPEC.	06/19/00	FENG			SUEDY			
	RELEASE	02/01/99	PAIR			SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK		APPD	DATE		DRAW <i>Pair</i>
REVISIONS						02/01/99			