
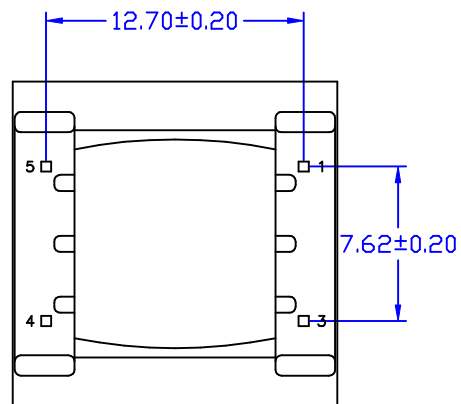
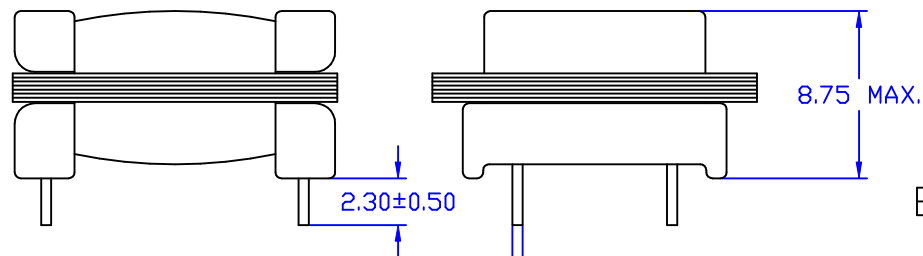
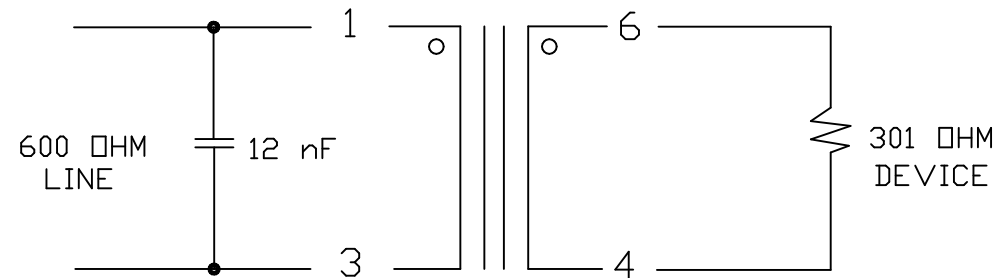


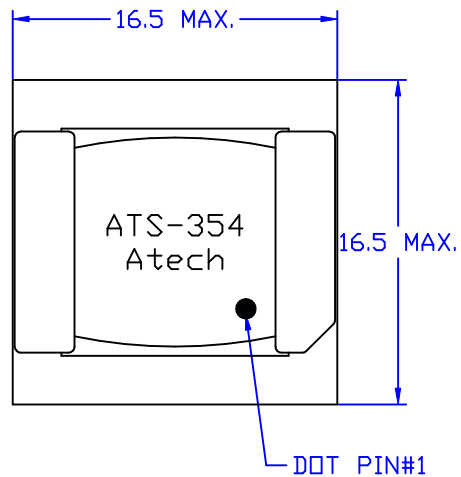

SQ 0.50 OR Ø0.6

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 150 OHM $\pm$ 12% PIN 6-4 = 150 OHM $\pm$ 12%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL) : PIN 1-3 = 18H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) PIN 1-3 = 3 $\pm$ 0.3 dB
5. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = $\pm$ 0.2 dB
6. LONGITUDINAL BALANCE : 200 HZ - 4KHZ 80 dB MIN.
7. TURN RATIO : (@9KHZ, 1Vrms) PIN 1-3 : 6-4 = 1 $\pm$ 1%
8. HI-POT : (@1500VAC, 5mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 301 TRANSFORMER	
B	HI-POT	06/08/2004	PAIR	AL	SUEDY		DWG. NO. ATS-354B	
A	FROM 8.0 CHANGE TO 8.75 MAX.	10/16/2003	PAIR	AL	SUEDY			
	RELEASE	07/17/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						07/17/01		
							SHEET 1 OF 1	
							DRAW Pair	