


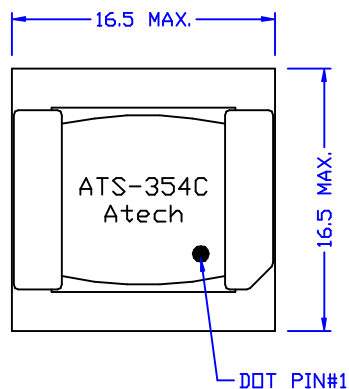


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 159 OHM $\pm$ 12%
PIN 6-4 = 134 OHM $\pm$ 12%
- INDUCTANCE PARALLEL (@250HZ, 1Vrms) :
PIN 1-3 = 15H MIN.
- RETURN LOSS (@REF. 600 OHM) : @200HZ = 30dB MIN.
@4KHZ = 30dB MIN.
- INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 301 OHM, 1-3 W/H 15nF) :
PIN 1-3 = 3.5dB MAX.
- FREQ. RESPONSE (@REF. 1KHZ) : @200HZ = $\pm$ 0.3dB
@4KHZ = $\pm$ 0.3dB
- TURN RATIO (@9KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8084		TITLE 600 : 301 TRANSFORMER	
								DWG. NO. ATS-354C	
	RELEASE	06/03/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						06/03/02			