
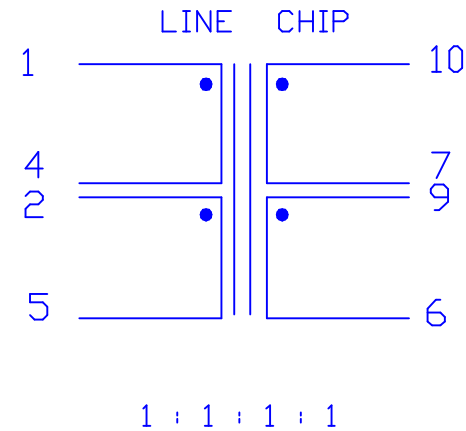
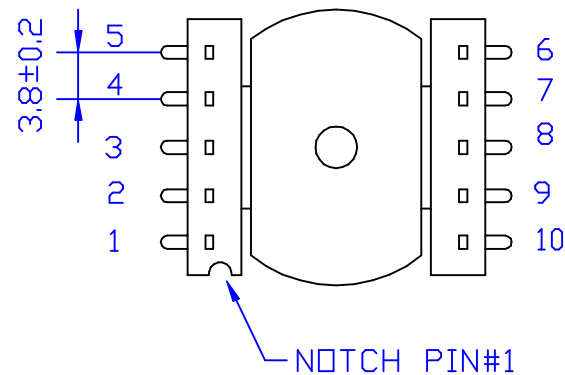
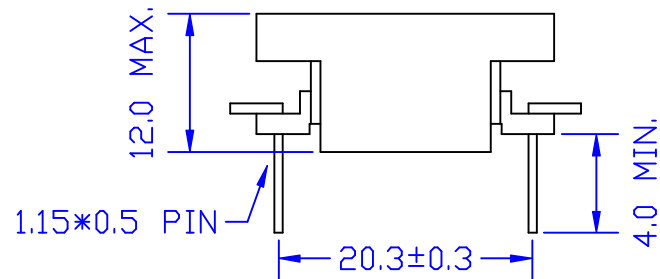


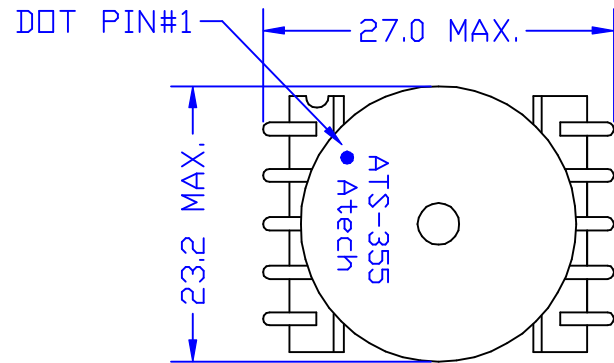

ELECTRICAL CHARACTERISTICS (FOR MTK20131 ADSL)

1. D.C.R. : 1-4 = 2-5 = 0.16 OHM MAX.
6-9 = 7-10 = 1.2 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms, 2-4 SHORT) 1-5 = 440uH +/-5%
3. INSERTION LOSS (@135 OHM LOAD)
40KHZ - 2MHZ = 3dB MAX.
4. LEACKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 2-4,7-10,6-9 SHORT)
1-5 = 15uH MAX.
5. TURNS RATIO : (@150KHZ, 1Vrms)
1-4 : 2-5 = 1+/-1% 1-4 : 10-7 = 1+/-1%
10-7 : 9-6 = 1+/-1%
6. HI-POT (@2000VAC, 1mA, 2SEC) PRI-SEC

						Atech [®]		TITLE	ADSL TRANSFORMER
B	LABEL	01/04/01	PAIR		SUEDY	Atech Technology Co., Ltd.		DWG. NO.	ATS-355
A	INDUCTANCE	09/29/00	PAIR		SUEDY	TEL:(02)27946667 FAX:(02)27948004			
	RELEASE	02/12/99	PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW	
REVISIONS						02/12/99		Pair	