
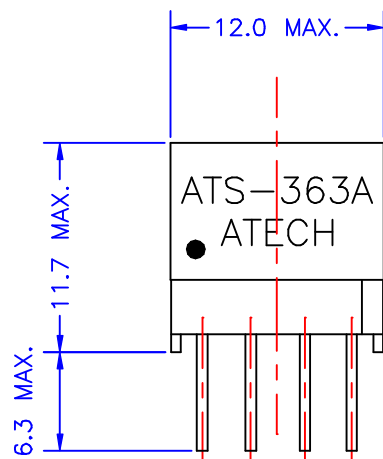


ELECTRICAL CHARACTERISTICS: (FOR STLC ATU-C)

1. D.C.R. : PIN 2-7 = 0.21 OHM MAX. PIN 3-4 = 0.2 OHM MAX.
PIN 4-6 = 0.2 OHM MAX. PIN 1-8 = 0.11 OHM MAX.
2. INDUCTANCE :(@1KHZ, 0.1Vrms) PIN 2-7 = 844uH MIN.
3. LEAKAGE INDUCTANCE :(@10KHZ, 0.1Vrms)
PIN3-6(W/H PIN1-8,PIN2-7 SHORT) = 5uH MAX.
4. INTERWINDING CAP. : (@10KHZ, 0.1Vrms)
PIN 2-3(W/H PIN7-1 SHORT) = 25pF MAX.
5. TURN RATIO : PIN 3-4 : 4-6 : 2-7 : 1-8 = 18 : 18 : 16 : 8
6. HI-POT :(@500 VAC, 1mA, 2SEC) PRI.-SEC.

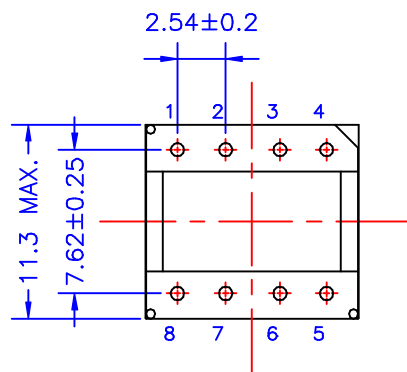

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ADLS-LT TRANSFORMER	
								DWG. NO. ATS-363A	
	RELEASE	09/18/00	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						09/18/00			