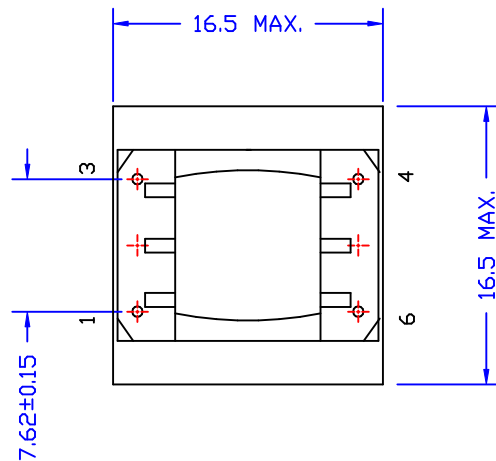
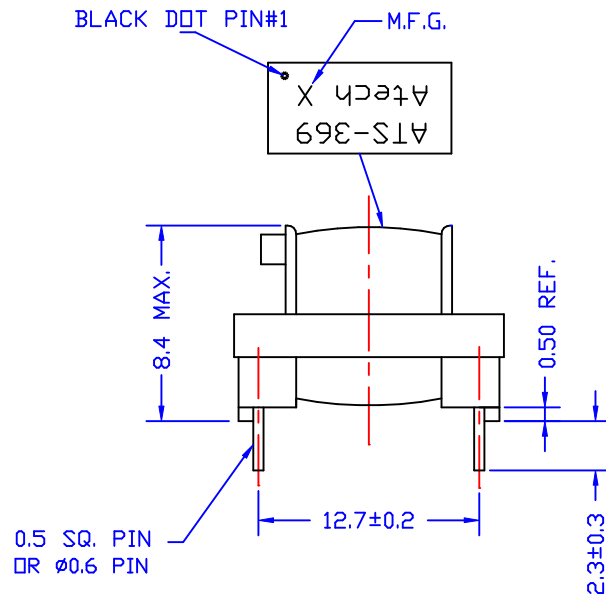


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 6-4 = 113 OHM $\pm$ 12%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL) : PIN 1-3 = 14H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) PIN 1-3 = 2.1 $\pm$ 0.3 dB
5. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = $\pm$ 0.2 dB
6. LONGITUDINAL BALANCE : 200 HZ - 4KHZ 80 dB MIN.
7. TURN RATIO : (11KHZ, 1Vrms) PIN 1-3 : 6-4 = 1 $\pm$ 1%
8. HI-POT : (@1500V, 5mA, 2SEC) PRI-SEC
9. LEAD-FREE

						Atech®		TITLE	600 : 374
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.	ATS-369AN
						RELEASE	10/01/2004	BART	SUEDY
						NO.	DESCRIPTION	DATE	BY
						DATE	DATE	DATE	DATE
						REVISIONS	10/01/04	SHEET 1 OF 1	DRAW
						UNITS:	M/M	SAFETY	Pair