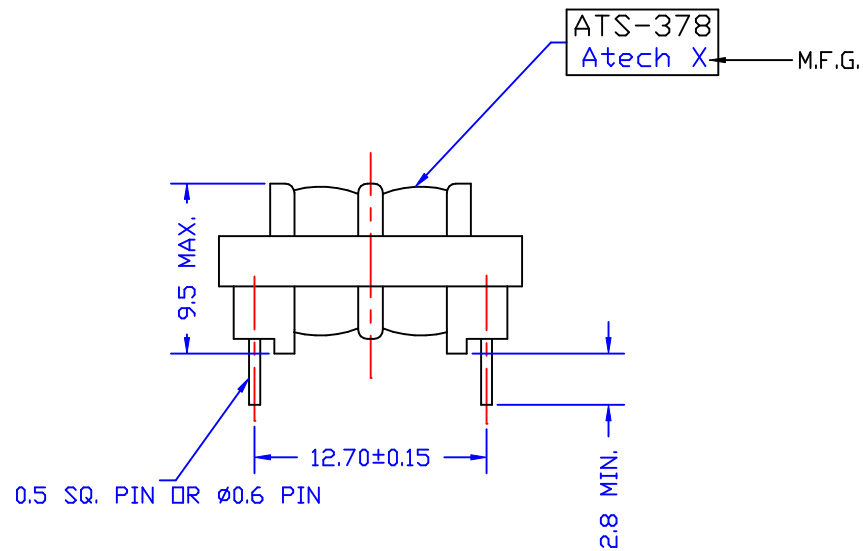


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R : PIN1-4 = 5-8 = 120 Ω HM+/-12%
- 2 INDUCTANCE :(<@1KHZ, 1Vrms>) PIN 1-4 = 1.2Hy MIN.
- 3 INSERTION LOSS :(<@1KHZ, 0dBm, PIN 5-8 W/H 360 Ω HM >
1-4 = 2.5dB TYP.
- 4 FREQ. RESP. :(<REF. 1KHZ>@300HZ = +/-0.5dB
@4KHZ = +/- 1dB
- 5 RETURN LOSS :(<REF. 600 Ω HM>@300-4KHZ = 25dB MIN.
- 6 TURN RATIO : (<@8KHZ, 1Vrms>) PIN 1-4 : PIN 8-5 = 1 +/-1%
- 7 HI-POT(<@3750VAC,1mA, 2SEC>) PRI.-SEC.
- 8 LEAD FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 360 TRANSFORMER	
							DWG. NO. ATS-378N	
	RELEASE	06/07/2004	PAIR		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						06/07/04	DRAW <i>Pair</i>	