

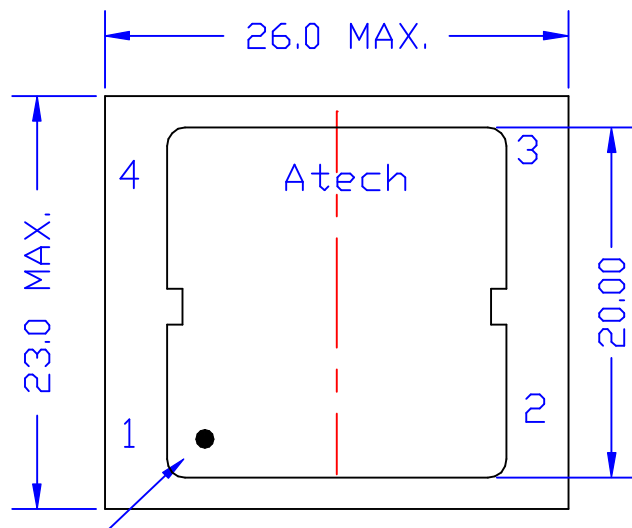


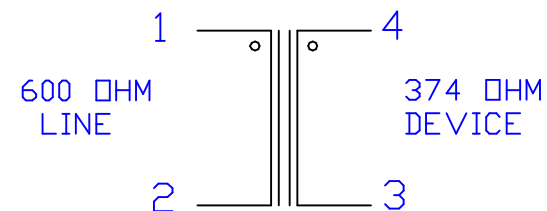

BLACK DOT PIN#1

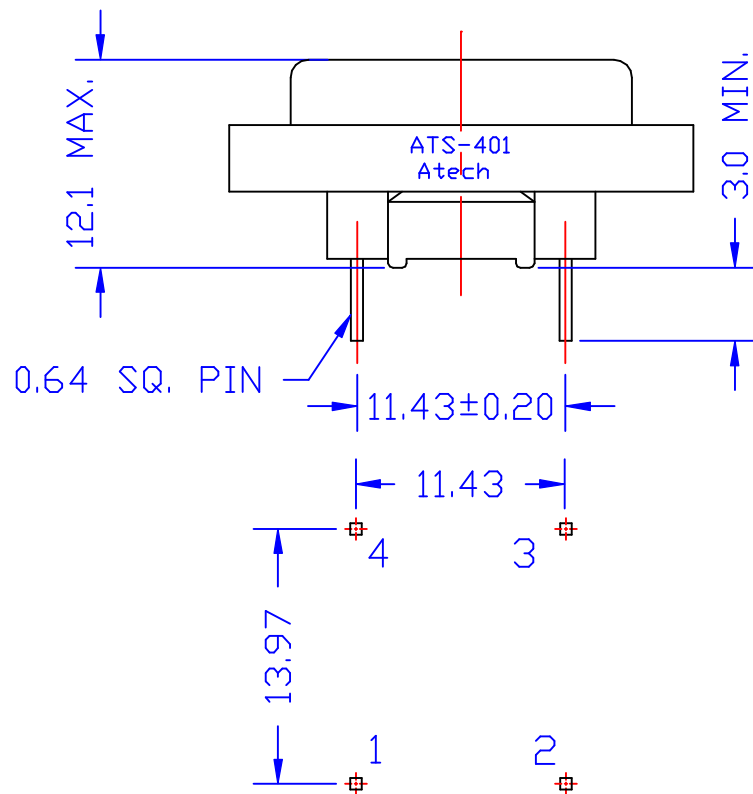

ELECTRICAL CHARACTERISTICS: (MEET UL1950)

1. D.C.R. : PIN 1-2 = 114 Ω HM+/-10% PIN 3-4 = 114 Ω HM+/-10%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL): PIN 1-2 = 10H MIN.
3. RETURN LOSS : (REF. 600 Ω HM) @ 300HZ = 10dB MIN.
@ 4KHZ = 15dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) 4.1 +/-0.2dB
5. FREQ. RESPONSE : (REF. 1KHZ) @300HZ = $\pm$ 0.2dB
@4KHZ = $\pm$ 0.4dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
7. TURN RATIO : (10KHZ, 1Vrms) PIN 1-2 : 4-3 = 1+/-1%
8. HI-POT : (@2000VAC, 1mA, 1 MIN) PRI-SEC

						Atech®		TITLE 600 : 374 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-8667 FAX:(02)2794-8004		ATS-401	
A	L = 10H	06/07/2003	RDRY	AL	SUEDY	UNITS: M/M		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						06/02/99		DRAW Pair	