
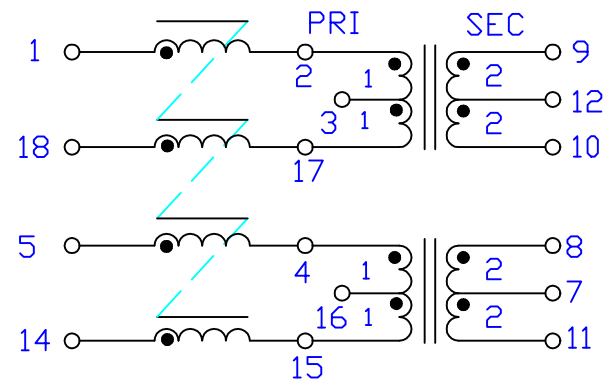


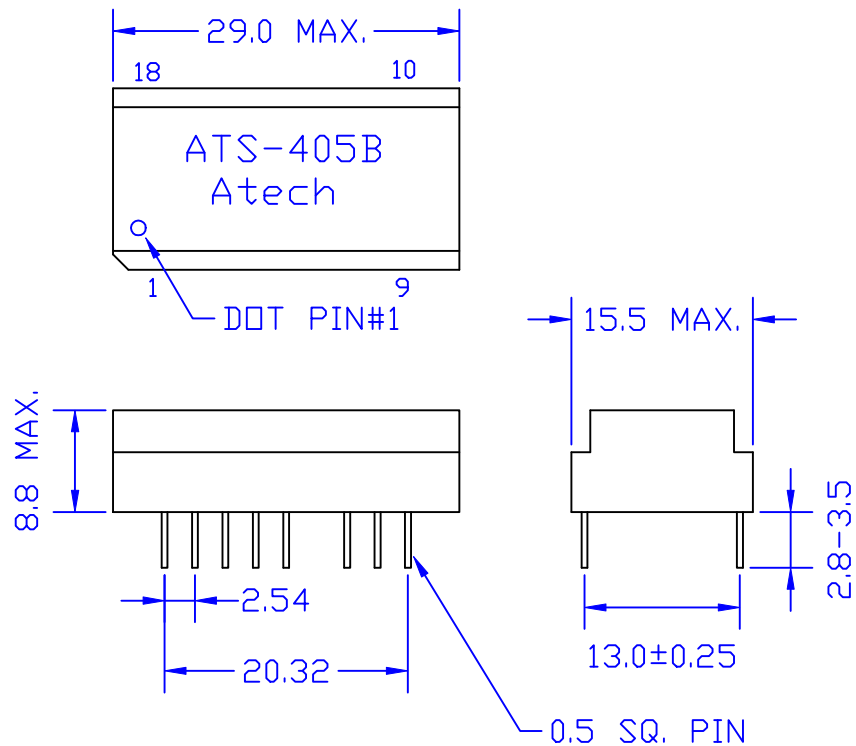

ELECTRICAL CHARACTERISTICS:

- D.C.R. : 2-17 = 4-15 = 3.0 Ω HM MAX.
9-10 = 8-11 = 6.0 Ω HM MAX.
1-2 = 17-18 = 4-5 = 14-15 = 1.0 Ω HM MAX.
- INDUCTANCE : (@10KHZ, 0.1Vrms)
2-17 = 4-15 = 22 mH MIN.
1-2 = 17-18 = 4-5 = 14-15 = 5mH +50/-30%
- LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms, 9-10,8-11 SHORT)
2-17 = 4-15 = 5uH MAX.
- CHOKE LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms, 17-18, 14-15 SHORT)
1-2 = 4-5 = 0.6uH MAX.
- INTERWINDING CAP: (@10KHZ,0.1Vrms)
1-9 = 5-8 = 150pF MAX.
- TURNS RATIO : (@15KHZ, 0.1Vrms)
9-10 : 2-17 = 2+/-1%
8-11 : 4-15 = 2+/-1%
1-2 : 18-17 = 5-4 : 14-15 = 1+/-1%
- HI-POT : 2-9, 4-8 (@2000Vrms, 1mA 2SEC.)
3-16 (@500Vrms, 1mA,2SEC, 1-9, 5-10 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ISDN	
								SO MODULE	
								DWG. NO.	
								ATS-405B	
	RELEASE	03/14/01	PAIR		SUEDY	UNITS:		SAFETY	
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/14/01		DRAW <i>Pair</i>	