
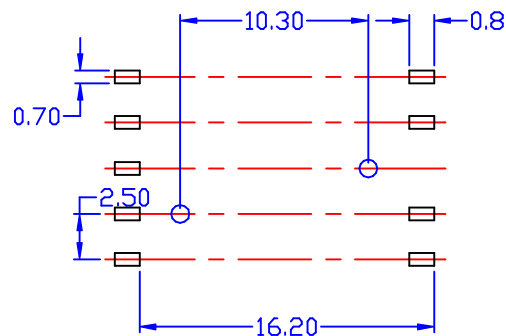
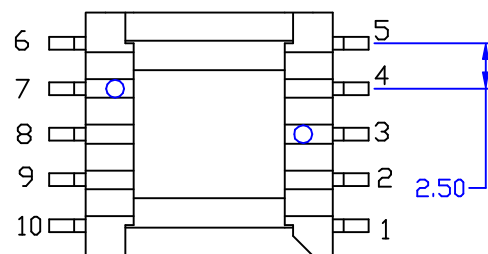
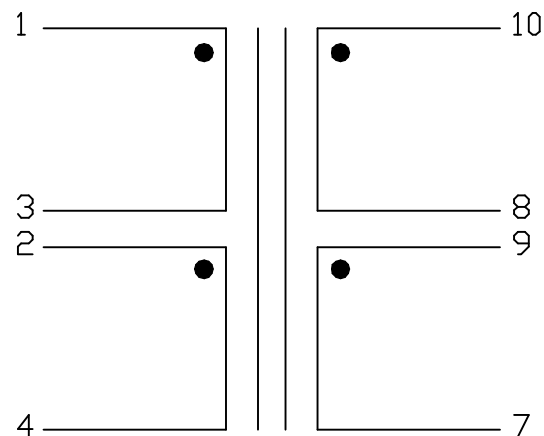



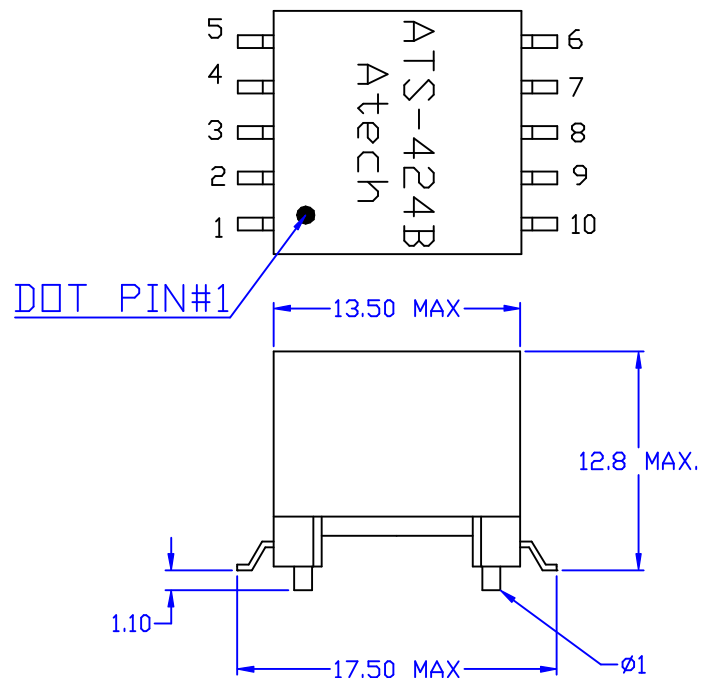

ELECTRICAL CHARACTERISTICS : <C1972 COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = $1.3 \Omega \pm 10\%$
PIN 9-7 = $1.12 \Omega \pm 10\%$
PIN 10-8 = $1.5 \Omega \pm 10\%$
- INDUCTANCE : (<10 KHZ, 1 Vrms, W/H 2-3 SHORT) 1-4 = $5 \text{ mH} \pm 10\%$
- LEAKAGE INDUCTANCE : (<100 KHZ, 0.1 Vrms, W/H 2-3, 8-9, 1-4 SHORT)
10-7 = $12 \mu\text{H MAX.}$
- INTERWINDING CAP. : (<10 KHZ, 0.1 Vrms, W/H 2-3, 8-9 SHORT)
1-10 = 55 pF MAX.
- TURN RATIO : (<10 KHZ, 1 Vrms) 10-7 (<8-9 SHORT) : 1-4 (<2-3 SHORT) = $1 \pm 1\%$
- HI-POT : (<1875 VAC, 1 mA, 2 SEC) 1-10 (<8-9, 2-3 SHORT)

						Atech®		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-424D	
RELEASE		08/03/2001	DOLLY		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						08/03/01		DRAW Pair	