
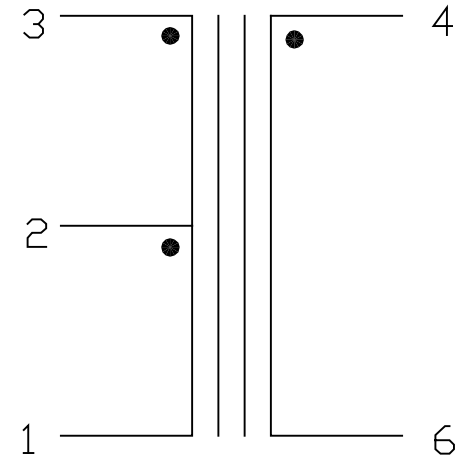
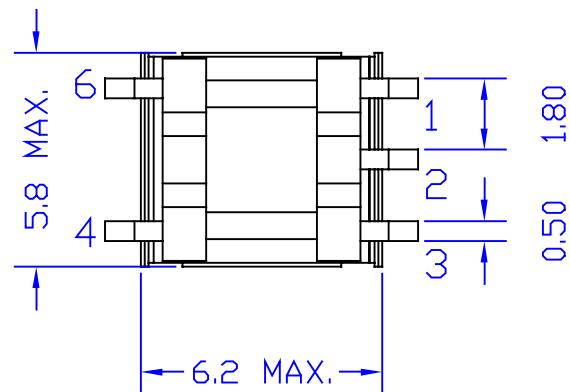


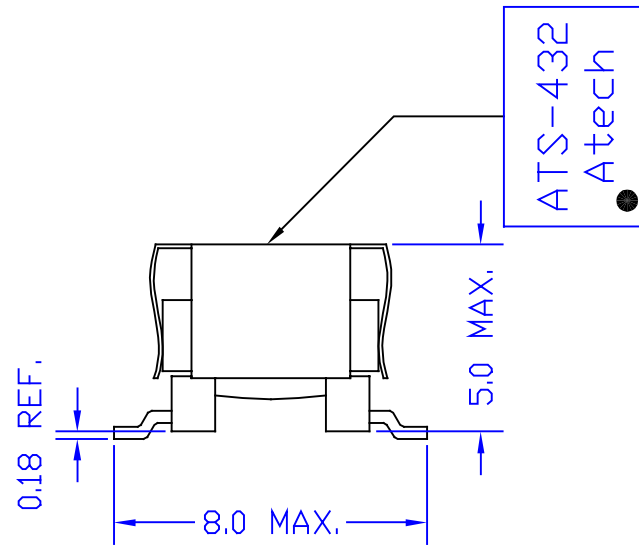

ELECTRICAL CHARACTERISTICS :

1. DCR: PIN3-2=1.23 OHM MAX. PIN2-1=1.38 OHM MAX. PIN4-6=1.9 OHM MAX.
2. INDUCTANCE: (@10KHZ, 0.1Vrms) PIN3-1=2 mH MIN.
3. LEAKAGE INDUCTANCE: (@100KHZ, 0.1Vrms) PIN3-1(4-6 SHORT)=1 uH MAX.
4. INTERWINDING CAP: (@100KHZ, 0.1Vrms) PIN3-4=50 pF TYP.
5. RETURN LOSS: (@REF 91.5 OHM) LOAD 50 OHM. 50KHZ=500KHZ=3MHZ=18dB MIN.
6. TURN RATIO: (@120KHZ, 1Vrms) PIN3-1 : 4-6=1.35±1%
7. HI-POT: (@1875VAC, 1mA, 1SEC) PIN3-4.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-432	
	RELEASE	06/23/00	FENG		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						06/23/00	DRAW <i>Pair</i>	