
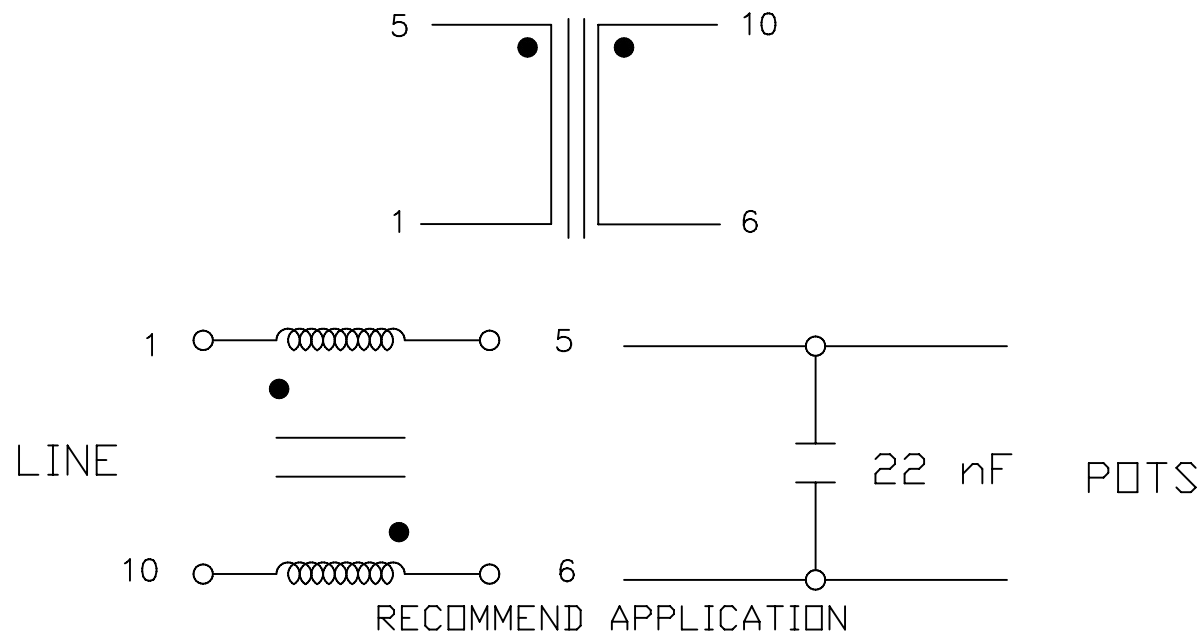
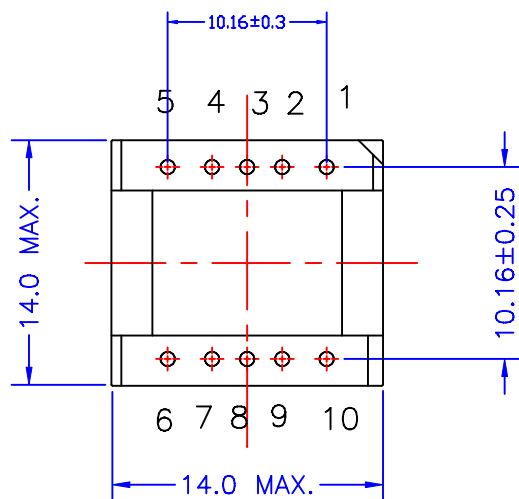


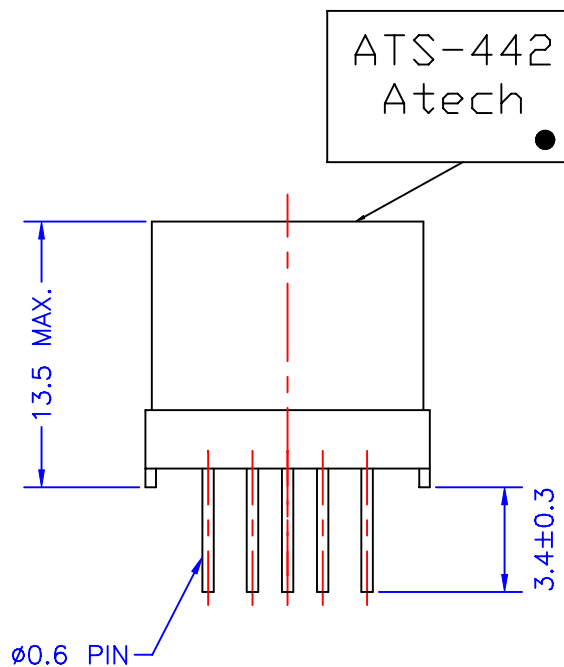

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-5 = PIN 6-10 = 2.2 OHM±12%
2. INDUCTANCE:(@1KHZ, 0.1Vrms , PIN 5-6 SHORT) : PIN 1-10=16 mH±5%
 PIN 1-5 = PIN 6-10 = 4mH ± 5%
 (@W/H 60 mA DC) : PIN 1-10 = 15mH MIN.
 (@W/H 80 mA DC) : PIN 1-10 = 10mH MIN.
 (@10KHZ, 0.1Vrms) : PIN 1-5 = PIN 6-10 = 3.95mH TYP.
3. TURN RATIO (@140KHZ, 0.1Vrms) PIN 1-5 : PIN 6-10 = 1±2%
4. HI-POT (@1KVAC, 1mA, 2SEC.) : PRI - SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE INDUCTOR	
B	MARKING&PIN DIM	10/18/2007	PAIR	WILLIE	EUGENE		DWG. NO. ATS-442	
A	INDUCTANCE	08/01/2003	RORY	SIMON	SUEDY	UNITS: M/M		SHEET 1 OF 1
	RELEASE	06/05/00	FENG		SUEDY	SAFETY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/05/00		DRAW Pair
REVISIONS								