
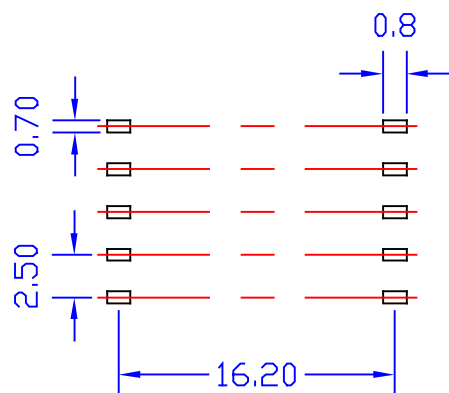
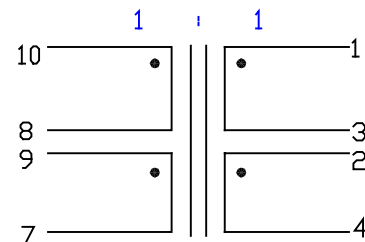
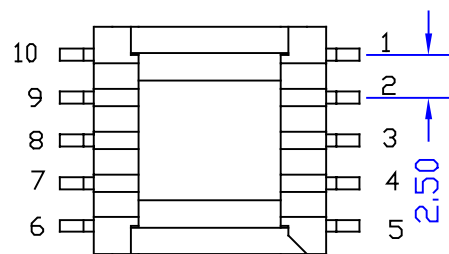
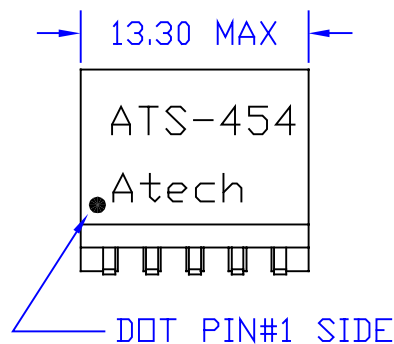


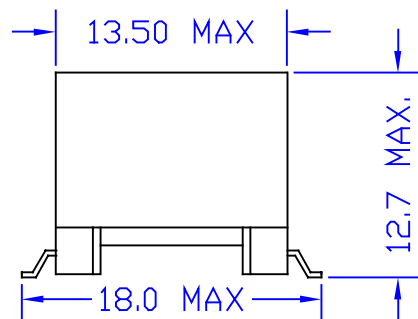

ELECTRICAL CHARACTERISTICS: (FOR C1603 COMPATIBLE)

1. D.C.R. : $10-8=9-7=0.59 \text{ OHM MAX}$ $1-3=0.67 \text{ OHM MAX}$ $2-4=0.67 \text{ OHM MAX}$.
2. INDUCTANCE : (@10KHZ, 0.1Vrms, 8-9 SHORT) $7-10 = 0.44 \text{ mH} \pm 5\%$
3. LEAKGE INDUCTANCE : (@100KHZ, 0.1Vrms, 8-9, 1-4, 2-3 SHORT) $10-7 = 10\mu\text{H MAX}$.
4. TURN RATIO : (@10KHZ, 0.1Vrms, 8-9, 2-3 SHORT) $1-4 : 10-7 = 1 \pm 1\%$
5. HI-POT (@ 1500 VAC, 0.5mA, 1SEC, 2-3,8-9 SHORT) 1-10

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-454	
	RELEASE	06/30/00	FENG		SUEDY		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD			
REVISIONS						06/30/00	SHEET 1 of 1	
							DRAW <i>Pair</i>	