
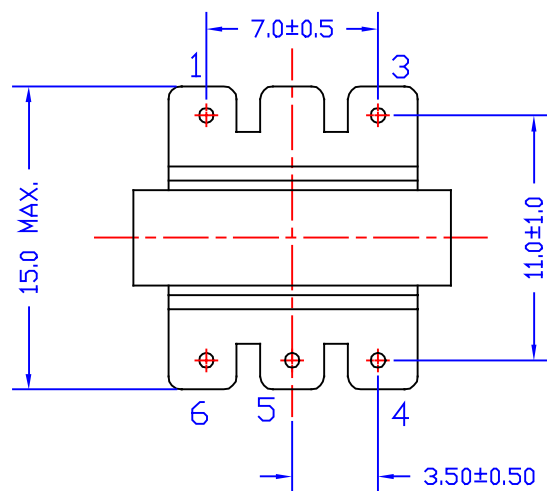



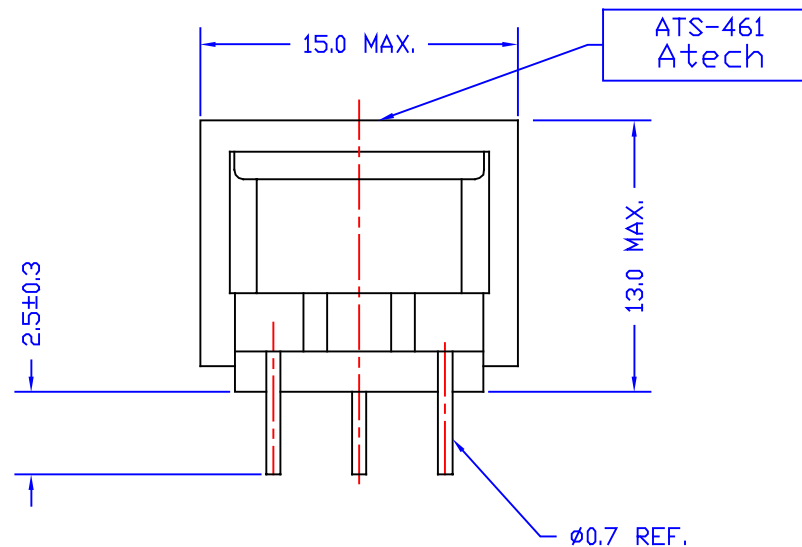

ELECTRICAL CHARACTERISTICS:

- DCR : 1-3 = $30.2 \pm 12\%$ 4-6 = $2.7 \pm 12\%$.
- INDUCTANCE PARALLEL : (@300HZ, 1Vrms) 1-3=1.5H MIN.
- INSERTION LOSS : (@1KHZ, 0dBm, 4-6 W/H 50 Ω HM) 1-3=1dB MAX.
- RETRUN LOSS : (@REF 600 Ω HM) @300HZ=19dB MIN.
@1KHZ=22dB MIN. @4KHZ=23dB MIN.
- TURN RATIO : (@80KHZ, 1Vrms) 1-3 : 4-6 = $3.47 \pm 1\%$
- FREQ. RESP. : (@REF 1KHZ) @300HZ= ± 0.35 dB @4KHZ= ± 0.35 dB.
- HI-POT : (@1650VAC, 1mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 50 TRANSFORMER	
							DWG. NO. ATS-461	
	RELEASE	07/07/00	FENG		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/07/00		
REVISIONS							DRAW Pair	