
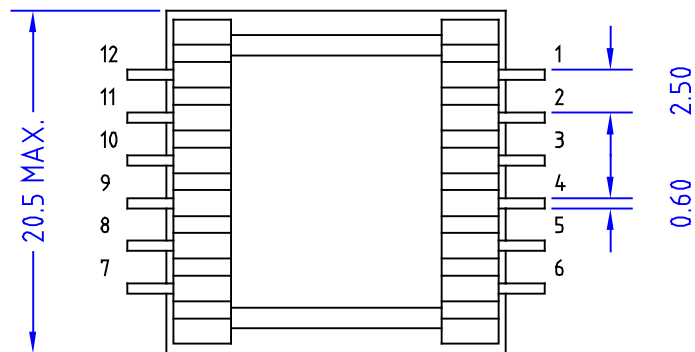
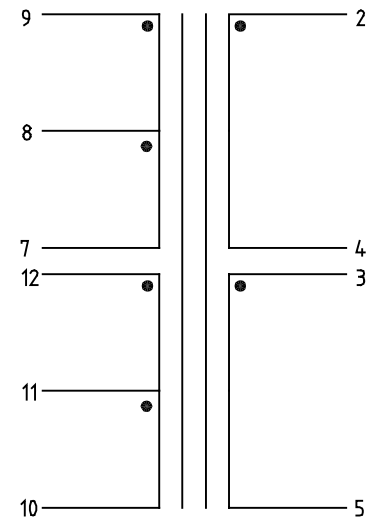


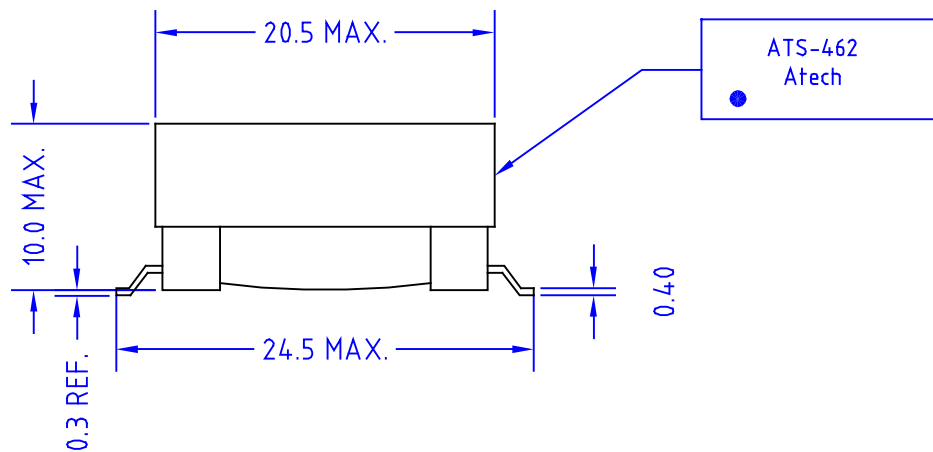

ELECTRICAL CHARACTERISTICS :

1. D.R.C. : 2-4=3-5=400mOHM $\pm$ 15% 12-10=9-7=410mOHM $\pm$ 15%
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 2-5(W/H 3-4 SHORT)=1025uH $\pm$ 10%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms) 2-5(W/H 3-4,12-10,9-7 SHORT)=10uH MAX.
4. INSERTION LOSS : (@276KHZ, 0dBm) 2-5(3-4,9-10 SHORT,7-12 W/H 100 OHM)=0.5dB MAX.
5. FREQ. RESP. : (@REF 276KHZ) @30KHZ - 1.1MHZ= $\pm$ 1dB
6. RETURN LOSS : (@REF 100 OHM) @30KHZ - 1.1MHZ=10dB MIN.
7. TRUN RATIO : (@300KHZ, 1Vrms) 3-5:2-4=1 $\pm$ 1% 9-7:12-10=1 $\pm$ 1% 2-4:9-7=1 $\pm$ 1%
8. HI-POT : (@1500VAC, 1mA, 1MIN) 2-9 (7-12, 3-4 SHORT)

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-462	
	RELEASE	07/19/00	FENG		SUEDY		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		DATE 07/19/00	
REVISIONS								SHEET 1 of 1
								DRAW <i>Pair</i>