
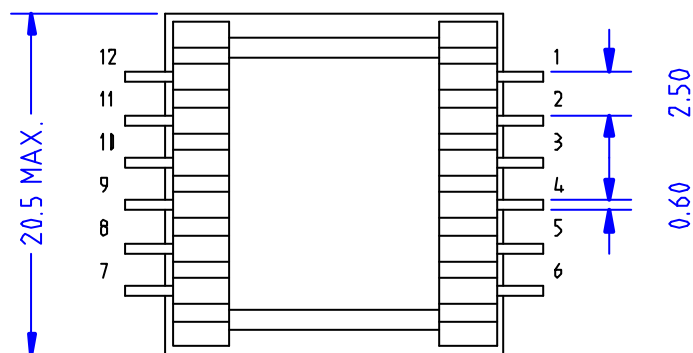
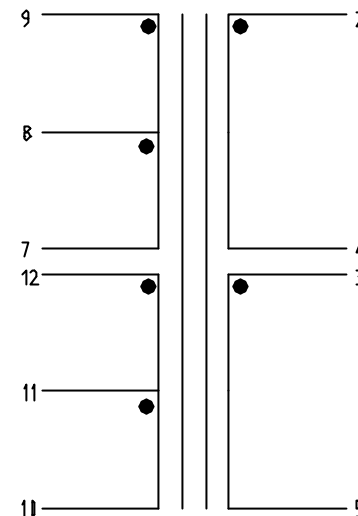


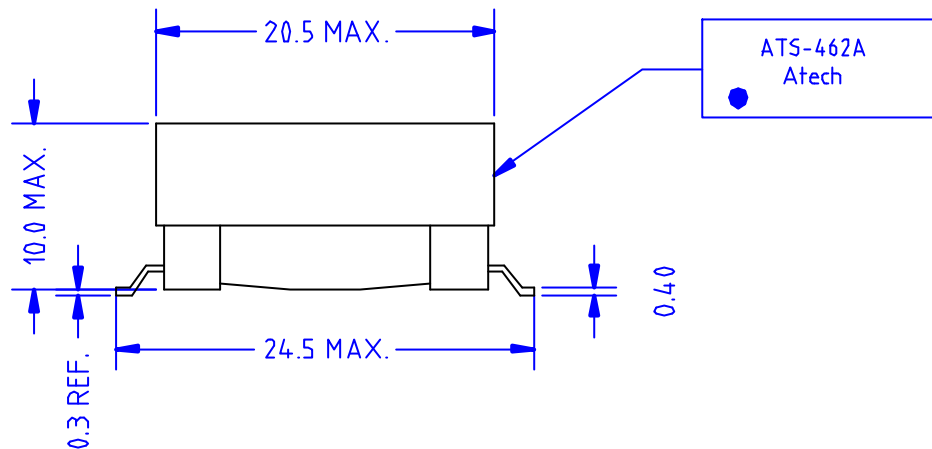

ELECTRICAL CHARACTERISTICS: (FOR U016B COMPATIBLE)

1. D.C.R. 2-4 = 3-5 = 550m OHM $\pm 15\%$ 11-10 = 9-8 = 305m OHM $\pm 15\%$
12-11 = 8-7 = 245M ohm $\pm 15\%$
2. INDUCTANCE :(@10KHZ, 0.1Vrms) 2-5 (W/H 3-4 SHORT) = 540uH $\pm 10\%$
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) 2-5 (W/H 3-4, 12-7,9-10 SHORT) = 7uH MAX.
4. TRUN RATIO : (<@900 KHZ, 1Vrms) 2-4 : 12-10 = 2-4 : 9-7 = 2-4 : 3-5 = 1 $\pm 1\%$
5. HI-POT (@1500VAC, 1mA, 1MIN) 2-9(7-12, 3-4 SHORT)
6. Cw(@100KHZ, 0.1Vrms) 2-9(W/H 3-4, 7-12 SHORT) = 70pF MAX

						Atech® Atech Technology Co., Ltd. TEL (02)2704-6667 FAX(02)2704-8004	TITLE ADSL TRANSFORMER	
							DWG. NO.	ATS-462A
	RELEASE	11/06/00	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/06/00		