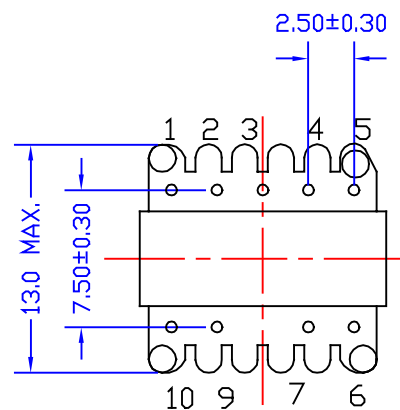
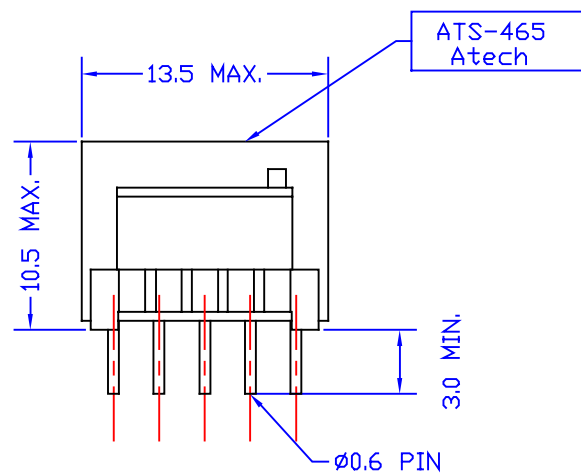


ELECTRICAL CHARACTERISTICS : <FOR ETE 13K38AY COMPATIBLE>

1. D.C.R : 6-7=9-10=1.87±12% 1-2=4-5=0.88±12%
2. INDUCTANCE : <@1KHZ, 0.1Vrms, 7-9 SHORT> 6-10=6.4mH±20%
3. LEAKAGE INDUCTANCE : <@100KHZ, 0.1Vrms, 7-9, 6-10, 2-4 SHORT> 1-5=30uH MAX.
4. INTERWINDING CAP. : <@10KHZ, 0.1Vrms, 7-9, 2-4 SHORT> 1-10=65pF MAX.
5. TURN RATIO : <@5KHZ, 1Vrms> 6-10<7-9 SHORT>:1-5<2-4 SHORT>=2±1%
1-2:4-5=1±1% 6-7:9-10=1±1%
6. HI-POT : <@1250VAC, 1mA, 2SEC> PRI-SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ISDN TRANSFORMER	
							DWG. NO. ATS-465	
	RELEASE	08/01/00	FENG		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						08/01/00		Pair