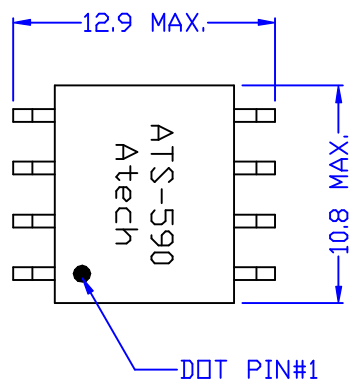


ELECTRICAL CHARACTERISTICS : <UTB00266S COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = 0.4 OHM $\pm$ 12%
PIN 8-5 = 7-6 = 0.87 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (W/H 2-3 SHORT) = 475uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 5-7 6-8 SHORT) = 8uH MAX.
- INTERWINDING CAP. (@100KHZ, 1Vrms) : PIN 1-8 (2-3 5-7 SHORT) = 25pF MAX.
- TURN RATIO (@5KHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-6 (5-7 SHORT) = 1.15 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1MIN) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER		
								DWG. NO. ATS-590		
	RELEASE	01/15/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/15/02				DRAW <i>Pair</i>
REVISIONS										