
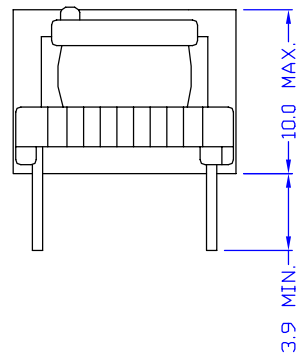



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 0.722 OHM $\pm 12\%$.
PIN 6-10 = 0.4 OHM $\pm 12\%$.
- INDUCTANCE :
(@100KHz, 0.1 Vrms) PIN 1-5 = 1mH $\pm 5\%$.
(@W/H 0.3A) PIN 1-5 = 0.88mH MIN.
- TURN RATIO (@1KHz, 1Vrms) :
PIN 1-5:6-10 = 10 $\pm 1\%$.
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-6

						Atech [®] Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE	INDUCTOR
B	SPEC & POINT	08/16/2005	BART	EEFLYS	SUEDY			DWG. NO.	ATC-02-018
A	PIN	08/16/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M DATE: 04/09/02		SAFETY SHEET 1 OF 1 DRAW <i>Pair</i>	
	RELEASE	04/09/2002	DOLLY	CPLIU	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	REVISIONS			