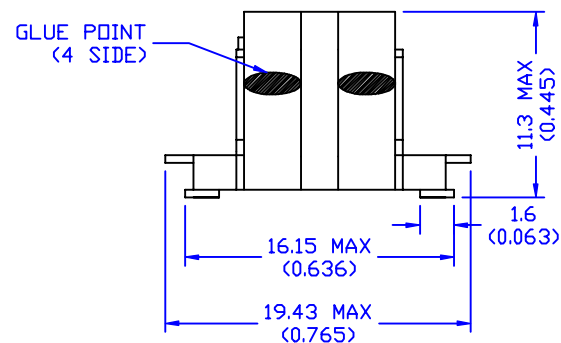



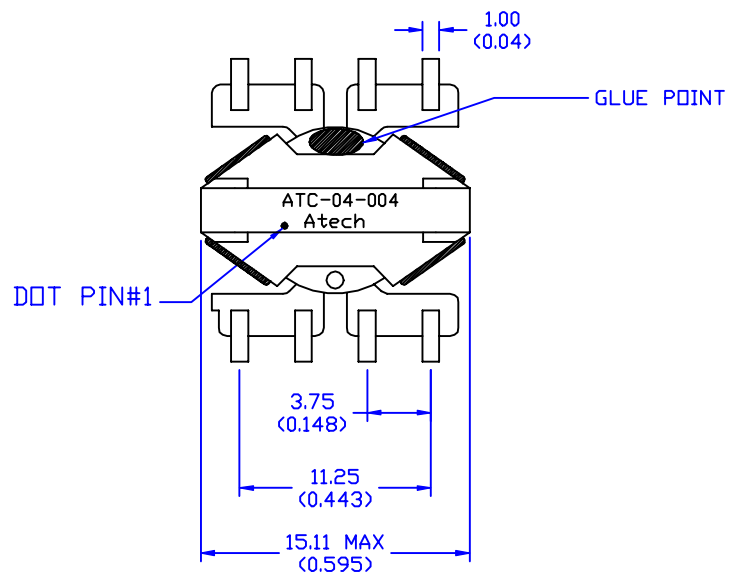


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 2-3 = 5 mΩ MAX.
PIN 5-6 = 120 mΩ MAX.
PIN 7-8 = 160 mΩ MAX.
- INDUCTANCE :
(@0.25VAC, 20KHZ) PIN 5-6 = 15 μH ± 12%.
(@2ADC) PIN 5-6 = 15 μH ± 12%.
- LEAKAGE INDUCTANCE (@0.1VAC, 400KHZ) :
PIN 5-6 = (2-3 SHORT) = 1.8 μH MAX.
- TURN RATIO (@3MHZ , 1Vrms) :
PIN 5-6:7-8 = 2 ± 5%.
PIN 5-6:2-3 = 7 ± 5%.
- HI-POT (1500VAC , 1mA, 2S) :
PIN 2-5, 2-7, 5-7
2-CORE, 5-CORE, 7-CORE.

						Atech® Atech Technology Co., Ltd. TEL022794-6667 FAX022794-8004		TITLE TRANSFORMER
								DWG. NO. ATC-04-004
	RELEASE	02/04/2004	BART	KEVIN	SUEDY	UNITS: M/M (INCHES)	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						02/04/04		