

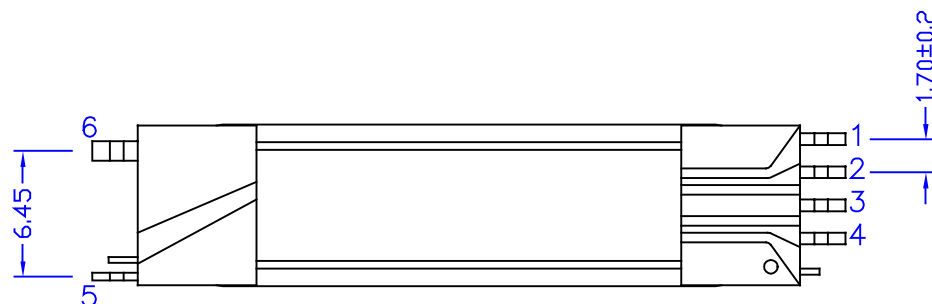
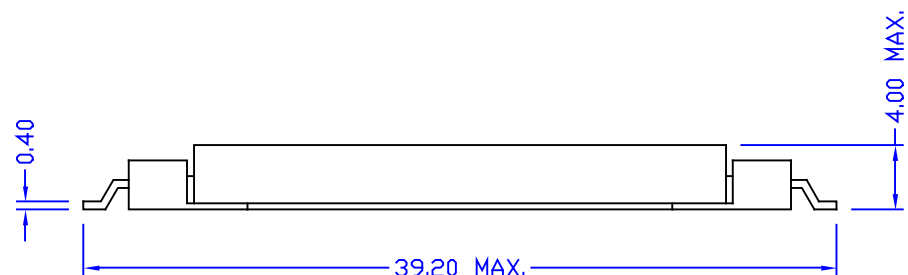


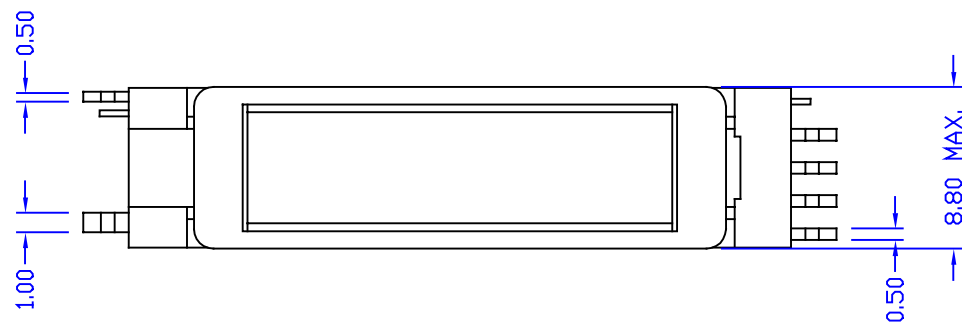

NONE TOLERANCE FOR REFERENCE

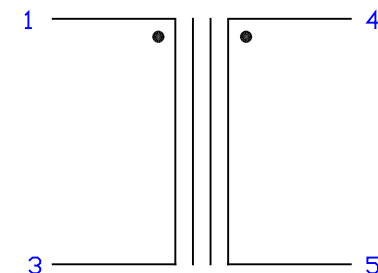

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 190 mΩ MAX.
PIN 4-5 = 750 Ω MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 4-5 = 765 mH ±20% (ALC OFF).
3. LEAKAGE INDUCTANCE (@20KHZ, 1Vrms) :
PIN 4-5 (1-3 SHORT) = 170 mH ±15% (ALC OFF).
4. POLARITY : PIN 4-5:1-3
5. HI-POT
(@500VAC, 3mA, 1MIN) : PRI-SEC, PRI-CORE.
(@1500VAC, 3mA, 1MIN) : SEC-CORE.

ATTENTION ITEN WHEN OPERATING :
PLEASE USE THE OSCILLATION FREQUENCY WITH 50KHZ~80KHZ.
PLEASE USE THE VOLTAGE OUTPUTING OPEN WITH 1600Vrms OR LESS.

						Atech®		TITLE
						Atech Technology Co., Ltd.		INVERTER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
A	W/O MARKING	08/02/2004	BART	AL	SUEDY	UNITS: M/M		ATC-04-045
	RELEASE	07/26/2004	BART	MICHAEL	SUEDY	SAFETY		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						07/26/04		Pair