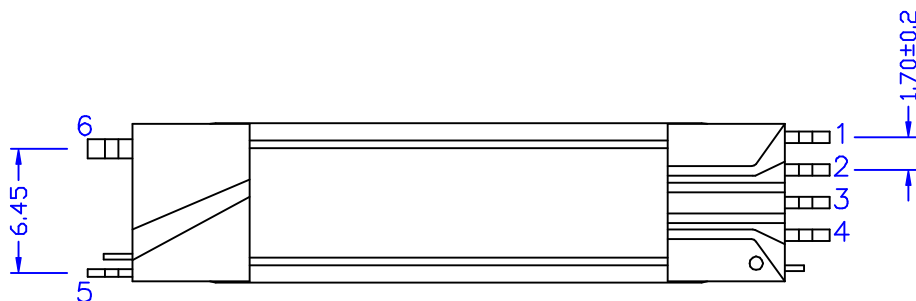
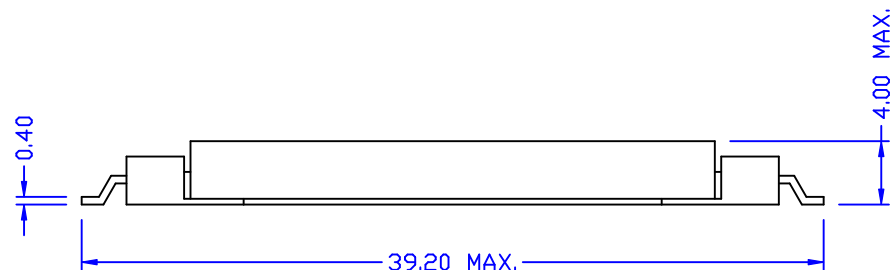
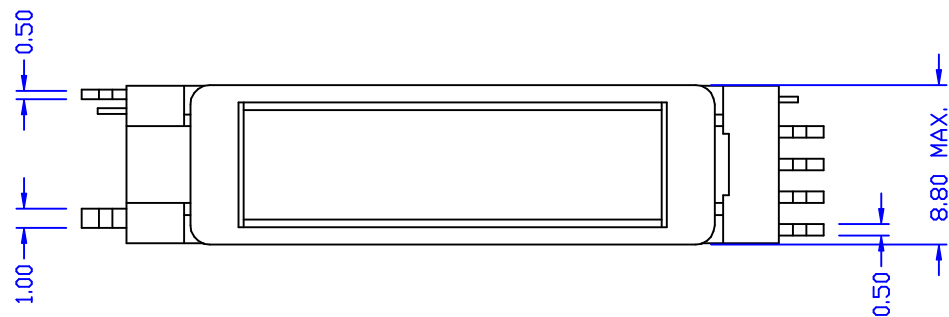


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 119 mΩHM ±20%.
PIN 4-5 = 890 ΩHM ±20%.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 3-1 = 67.3 uH ±20%.
PIN 4-5 = 837 mH ±20%.
- LEAKAGE INDUCTANCE (@50KHZ, 1Vrms):
PIN 4-5 = 297 mH ±10%.
- HI-POT :
(@500VAC, 0.5mA, 1MIN) : PIR-SEC.
(@1600VAC, 0.5mA, 2S) : SEC-CORE.

ATTENTION ITEN WHEN OPERATING :
PLEASE USE THE OSCILLATION FREQUENCY WITH 50KHZ~80KHZ.
PLEASE USE THE VOLTAGE OUTPUTING OPEN WITH 1600Vrms OR LESS.

NONE TOLERANCE FOR REFERENCE

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE INVERTER	
							DWG. NO. ATC-04-060	
	RELEASE	09/06/2004	BART	PAKER	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/06/04		
REVISIONS							DRAW <i>Pair</i>	