

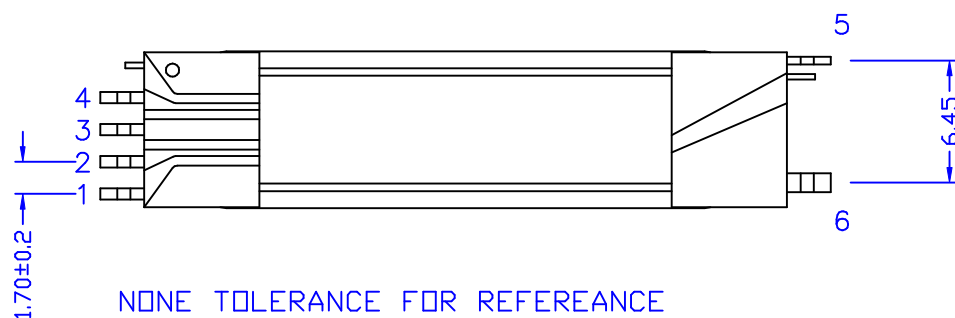


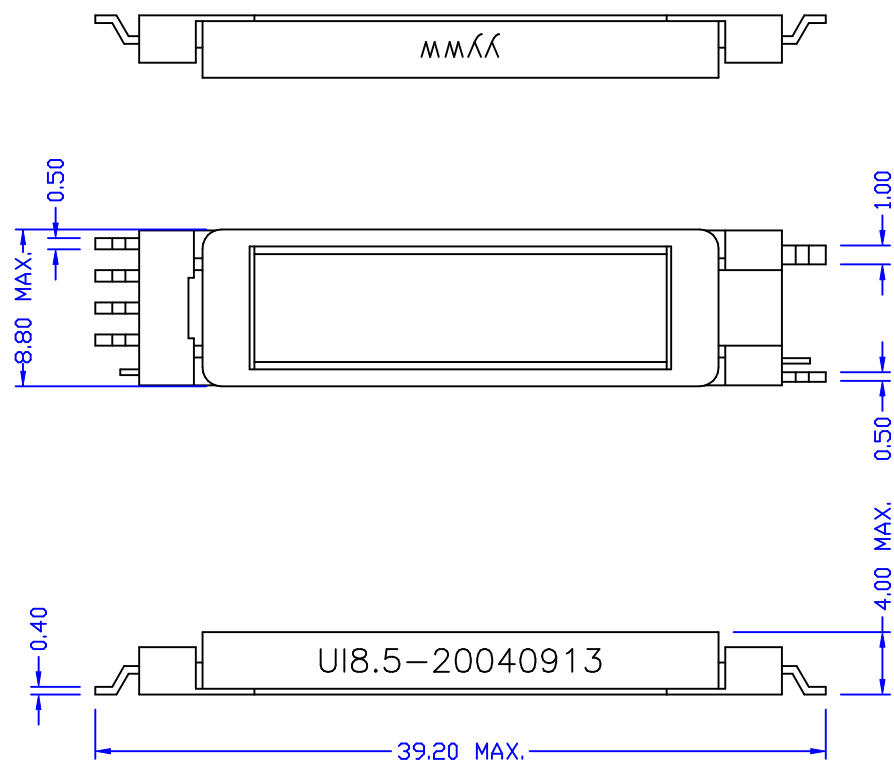

NONE TOLERANCE FOR REFERENCE

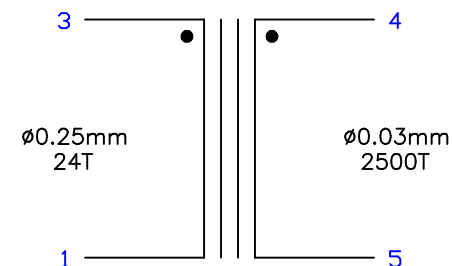

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-1 = 133 mΩHM ±20%.
PIN 4-5 = 894 ΩHM ±20%.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 3-1 = 73.3 uH ±20%.
PIN 4-5 = 764 mH ±20%.
3. LEAKAGE INDUCTANCE (@50KHZ, 1Vrms):
PIN 4-5 = 290 mH ±10%.
4. HI-PDT :
(@500VAC, 0.5mA, 1MIN) : PIR-SEC.
(@1600VAC, 0.5mA, 2S) : SEC-CORE.

ATTENTION ITEN WHEN OPERATING :
PLEASE USE THE OSCILLATION FREQUENCY WITH 50KHZ~80KHZ.
PLEASE USE THE VOLTAGE OUTPUTING OPEN WITH 1600Vrms OR LESS.

						Atech® Atech Technology Co., Ltd. TEL:02794-6667 FAX:02794-8004		TITLE INVERTER	
A	ADD MARKING & VIEW	11/18 /2004	BART	BART	SUEDY	UNITS: M/M		DWG. NO. ATC-04-060A	
	RELEASE	09/06 /2004	BART	PAKER	SUEDY	SAFETY		SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/06/04		DRAW <i>Pair</i>	
REVISIONS									