
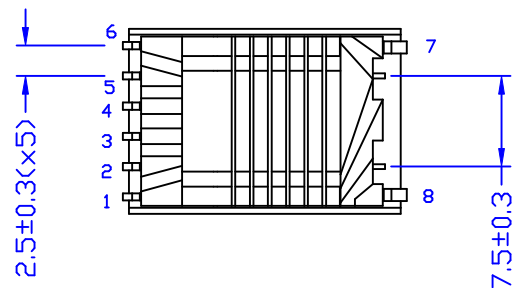
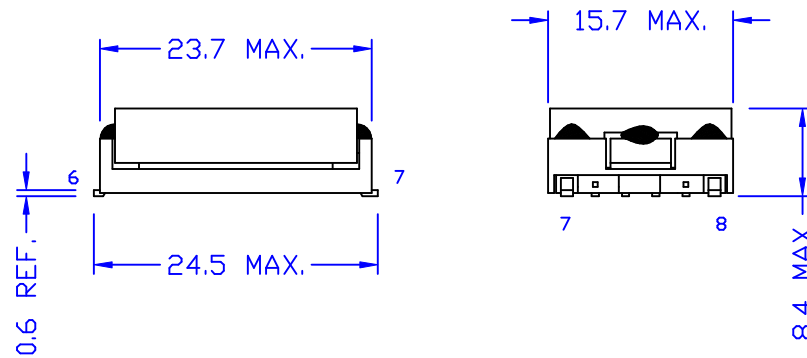


EPOXY(x6)

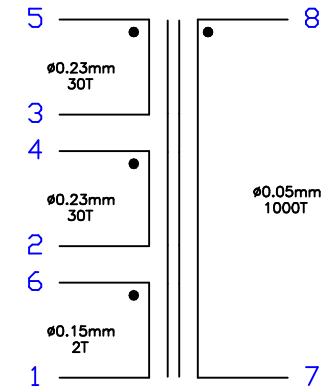

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 5-3 = 0.29 OHM $\pm 20\%$.
PIN 4-2 = 0.29 OHM $\pm 20\%$.
PIN 6-1 = 0.053 OHM REF.
PIN 7-8 = 206 OHM $\pm 20\%$.
- INDUCTANCE (@1KHZ, 0.25V) :
PIN 5-3 = 179uH $\pm 15\%$.
PIN 4-2 = 179uH $\pm 15\%$.
PIN 6-1 = 0.72uH REF.
PIN 7-8 = 196mH $\pm 25\%$.
- HI-POT :
(@2000VAC, 0.5mA, 2S) : SEC-CORE.

						Atech®		TITLE INVERTER, TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATC-04-077	
RELEASE		11/19/2004	BART	PAKER	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						11/19/04		DRAW Pair	