
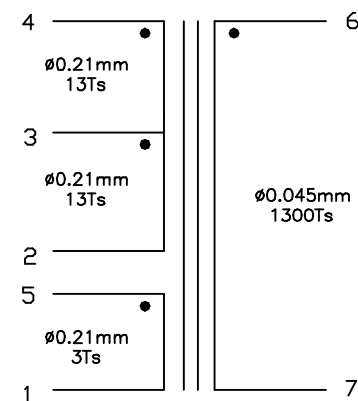


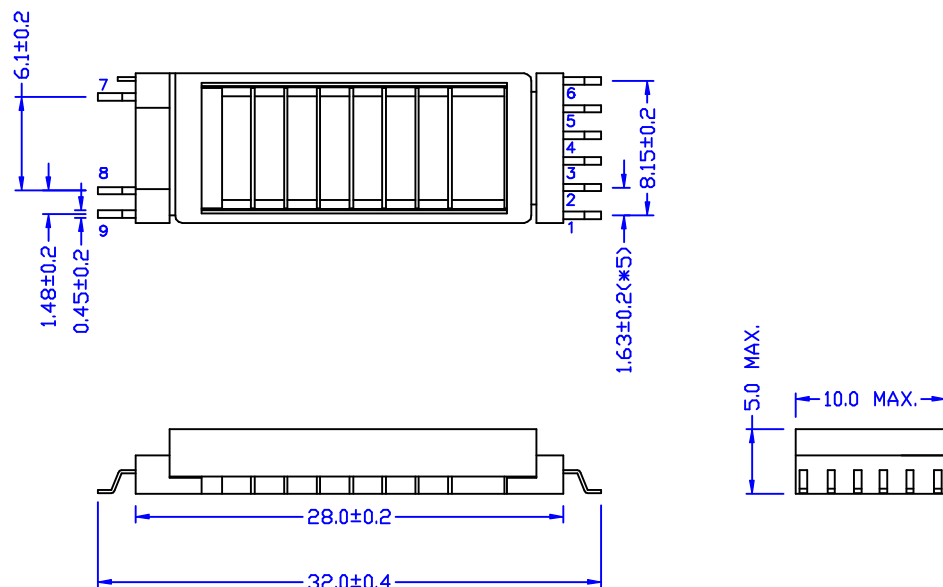

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 4-3 = $0.136 \text{ OHM} \pm 20\%$.
PIN 3-2 = $0.135 \text{ OHM} \pm 20\%$.
PIN 5-1 = $0.036 \text{ OHM} \pm 20\%$.
PIN 6-7 = $258 \text{ OHM} \pm 20\%$.
- INDUCTANCE (@70KHZ, 0.25Vrms) :
PIN 4-3 = $20.5 \text{ uH} \pm 20\%$.
PIN 3-2 = $20.5 \text{ uH} \pm 20\%$.
PIN 5-1 = 1.0 uH REF. .
PIN 6-7 = $201 \text{ mH} \pm 15\%$.
- HI-POT:
(@1200VAC, 3mA, 1MIN.) : PRI-SEC
(@500VAC, 3mA, 1MIN.) : PRI-CORE
(@1200VAC, 3mA, 1MIN.): SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004		TITLE INVERTER	
A	SPEC.	02/04/2005	BART	PAKER	SUEDY			DWG. NO. ATC-04-079	
	RELEASE	11/29/2004	BART	PAKER	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/29/04		DRAW Pair	
REVISIONS									