
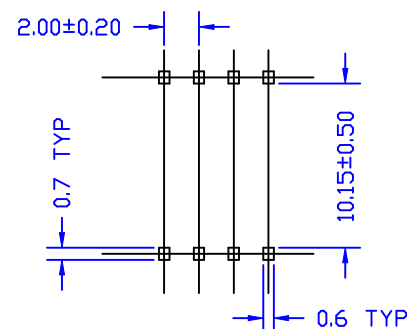


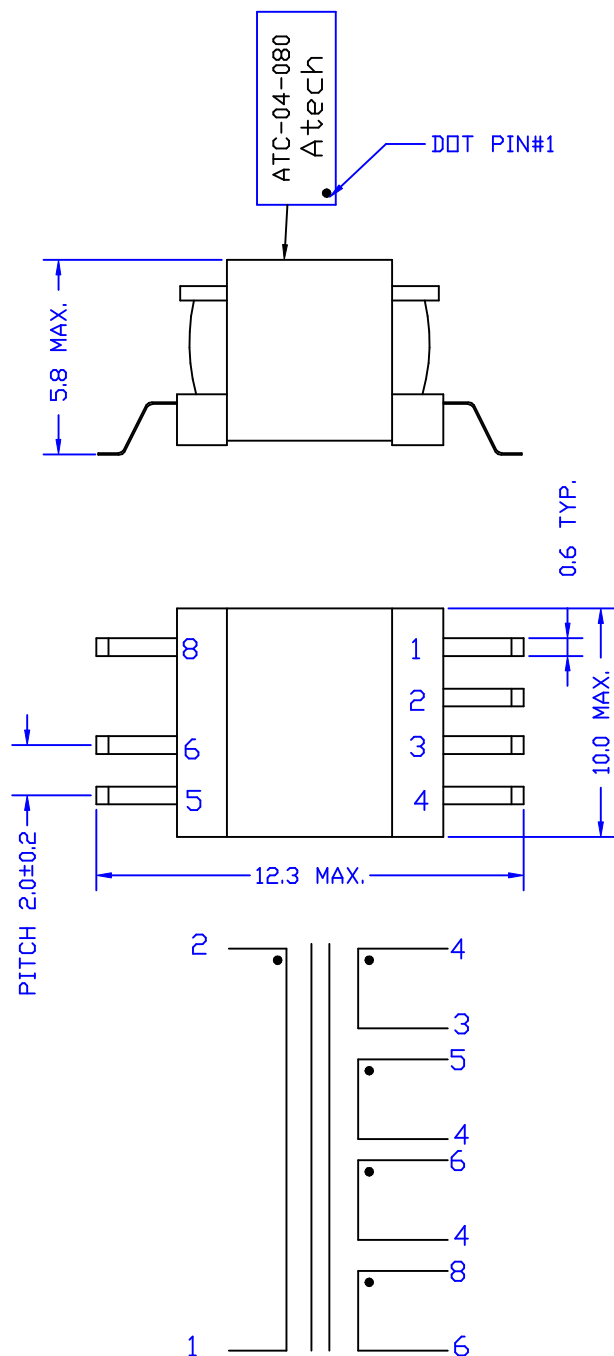

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 0.64 Ω M MAX.
PIN 3-4 = 1.74 Ω M MAX.
PIN 5-4 = 0.65 Ω M MAX.
PIN 6-4 = 0.50 Ω M MAX.
- INDUCTANCE (@1KHZ, 0.25 Vrms) :
PIN 1-2 = 200 μ H $\pm$ 10%.
- LEAKAGE INDUCTANCE (@1KHZ, 0.25 Vrms) :
PIN 1-2 (3-4-5-6-8 SHORT) = 17.9 μ M MAX.
- HI-POT (@500VAC, 1mA, 1SEC) :
PRI-SEC, PRI-CORE, SEC-CORE

						Atech®		TITLE
						Atech Technology Co., Ltd.		DC/DC
						TEL:(02)2794-8667 FAX:(02)2794-8004		DWG. NO.
								ATC-04-080
NO.	RELEASE	11/22/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	11/22/04	DRAW Pair