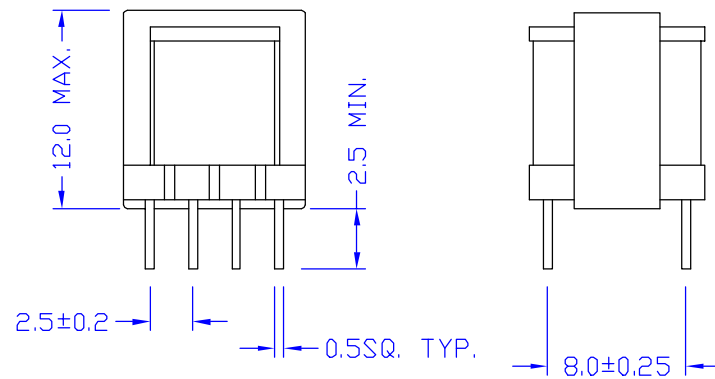
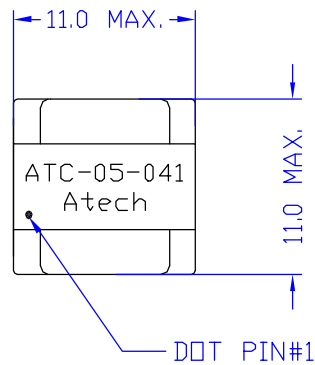


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 1.8 OHM MAX.
PIN 2-4 = 2.5 OHM MAX.
PIN 5-6 = 2.1 OHM MAX.
PIN 6-8 = 2.2 OHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms, ALC OFF) :
PIN 1-4 (W/O DC) = 10 mH MIN.
PIN 1-4 (W/H 10mA DC) = 7.5 mH MIN.
- INTERWINDING CAP (@10KHz, 0.1Vrms, ALC OFF) :
PIN 1-7 = 5-7 = 50 pF REF.
- TURN RATIO (@10KHz, 0.1Vrms) :
PIN 1-4:5-8 = 1 ±2%.
- HI-POT (@500VAC, 0.1mA, 2S) :
PRI-SEC.

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-05-041	
	RELEASE	08/31/2005	BART	EEFLYS	SUEDY	UNITS: M/M	SAFETY	SHEET 10F	1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						08/31/05			