
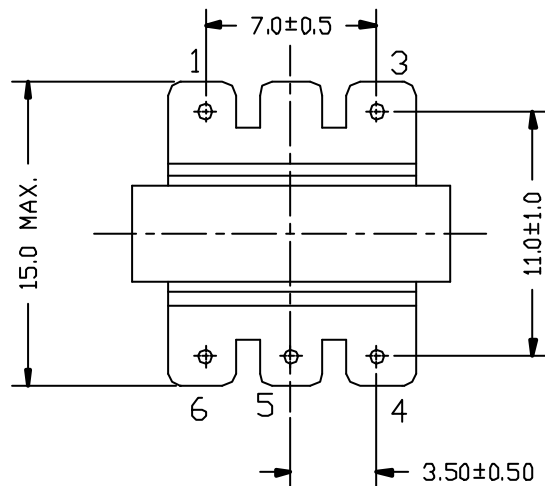
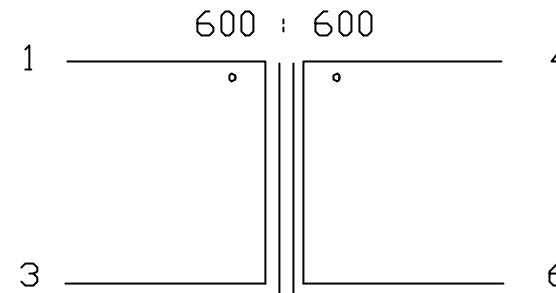


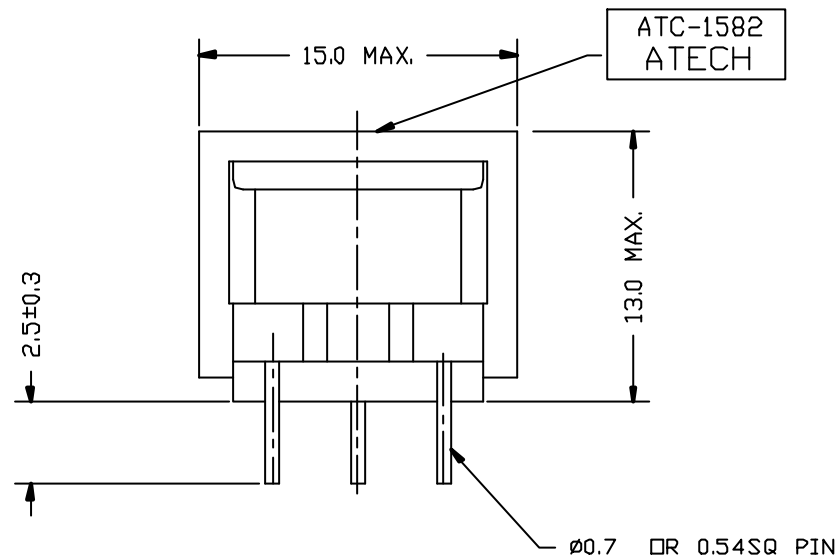

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 30 Ω M $\pm$ 15% , PIN 4-6 = 38 Ω M $\pm$ 15%.
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 1.5H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω M)
PIN 1-3 = 600 Ω M $\pm$ 5%.
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 Ω M) : 1dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = $\pm$ 0.35dB
@4KHZ = $\pm$ 0.35dB
6. RETURN LOSS (REF. 600 Ω M) : @300HZ = 19dB MIN.
@1KHZ = 22dB MIN. @4KHZ = 23dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%.
8. HI-POT(@1200VAC, 1mA, 1MINUTE) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-8887 FAX: (02)2794-8884	TITLE 600 : 600 TRANSFORMER	
B	ADD SQ PIN	12/22/00	PAIR		SUEDY		DWG. NO. ATC-1582	
A	Z=+/-5%							
	RELEASE		PAIR		SUEDY	UNITS M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS								