
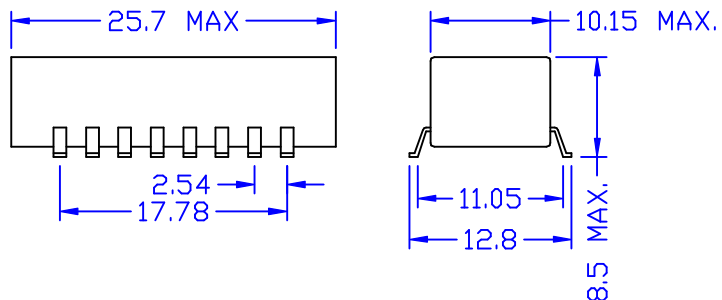
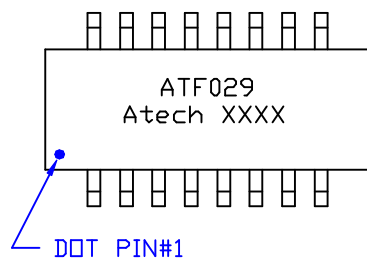


SUGGESTED FOOTPRINT

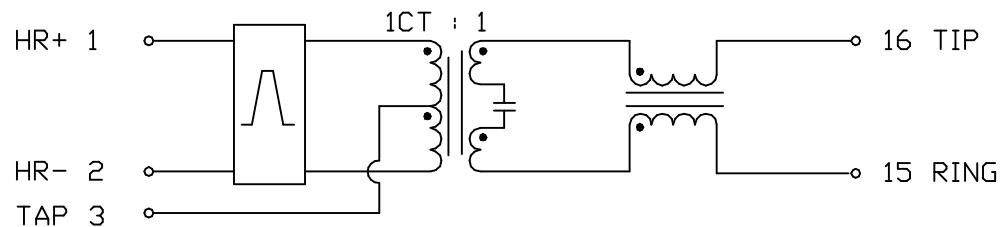

ELECTRICAL CHARACTERISTICS:(EPB5100G COMPATIBLE)

1. INSERTION LOSS : -2.2dB MAX (@4.25MHZ - 9.75MHZ)
2. ATTENUATION : -55dB MIN (@1.1MHZ), -30dB MIN (@22MHZ)
-45dB MIN (@54MHZ)
3. RETURN LOSS : -8dB MIN (@4.25MHZ - 9.75MHZ)
4. CMRR : -50dB MIN (@1-10MHZ)
5. ISOLATION VOLTAGE : 1500 Vrms (INPUT TO OUTPUT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE HOME LAN B/P FILTER	
							DWG. NO. ATF029	
	RELEASE	07/23/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						07/23/01	SHEET 1 OF 1	
							DRAW <i>Pair</i>	