
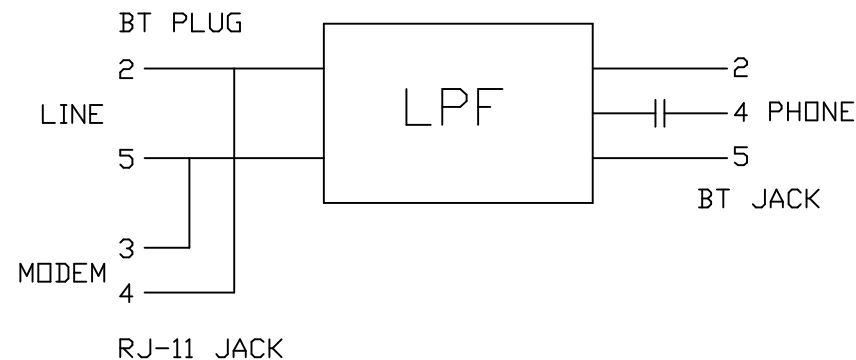
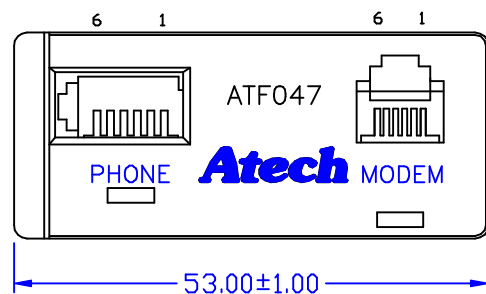
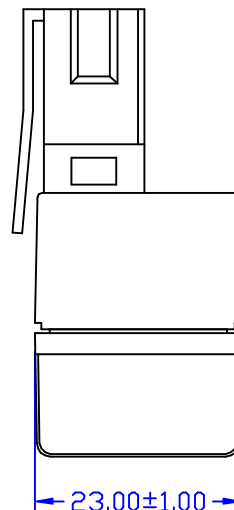


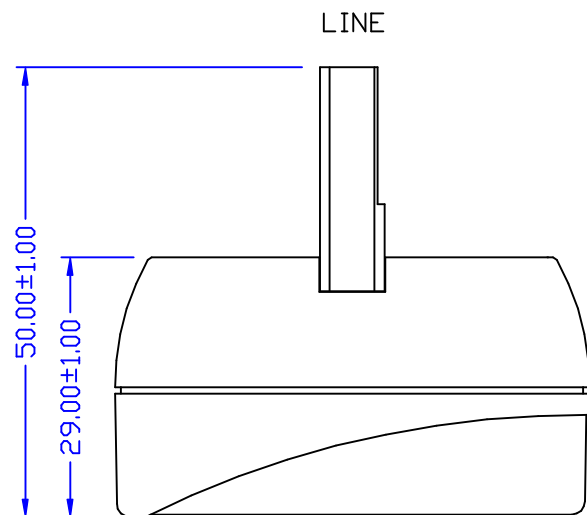

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS : (@SRL-L) = 13dB MIN.
(@ERL) = 11dB MIN.
(@SRL-H) = 7dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.

C	PIN OUT	06/24/2003	RORY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE MICRO FILTER FOR UK	
B	DIMENSION	10/28/2002	DOLLY	JEFF	SUEDY		DWG. NO.	
A	DIMENSION	08/15/2002	DOLLY	JEFF	SUEDY		ATFO47	
	RELEASE	07/02/2002	DOLLY	JEFF	SUEDY			
NO	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 10F 1
REVISIONS						DATE		DRAW Pair
						07/02/02		