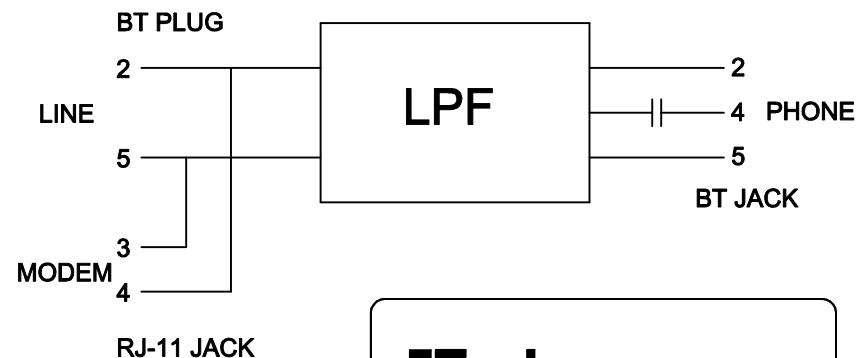
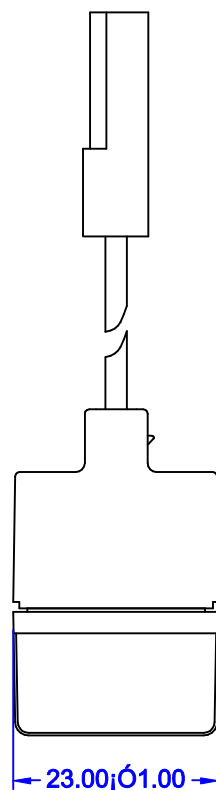
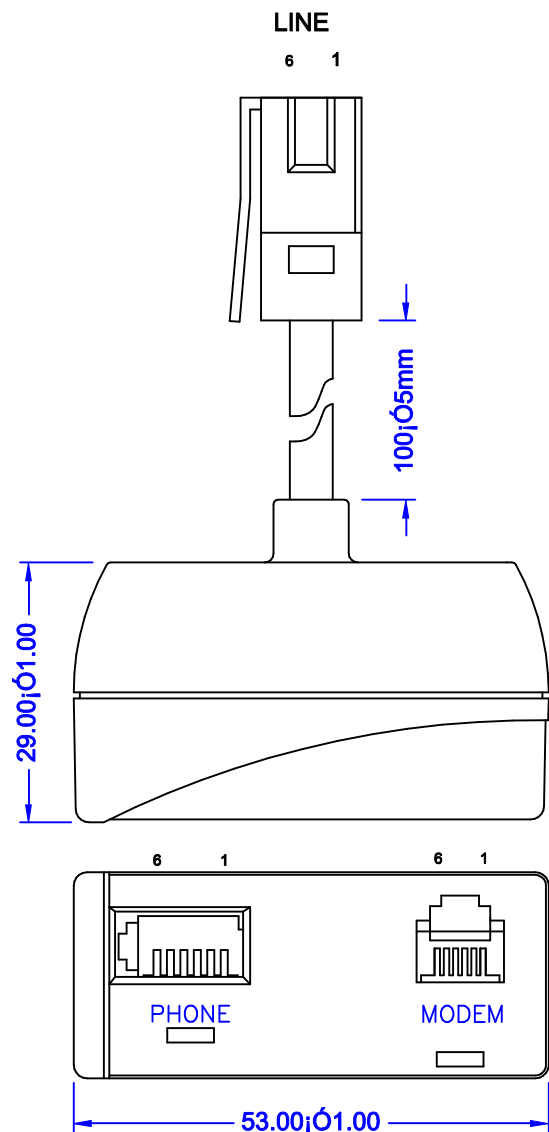


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS : (@SRL-L) = 13dB MIN.
 (@ERL) = 11dB MIN.
 (@SRL-H) = 7dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
 (@50KHZ) : 30dB MIN.
 (@100KHZ) : 40dB MIN.

					Atech® Atech Technology Co., Ltd. TEL: (02)2794-8867 FAX: (02)2794-8004	TITLE MICRO FILTER FOR UK		
B	MARKING	09/22 /2003	RORY	AL		SUEDY	DWG. NO.	ATF047B1
A	MARKING	09/03 /2003	PAIR	AL		SUEDY		
	RELEASE	06/26 /2003	RORY	AL		SUEDY	UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK		APPD	DATE 06/26/03	
REVISIONS							DRAW <i>Pair</i>	