

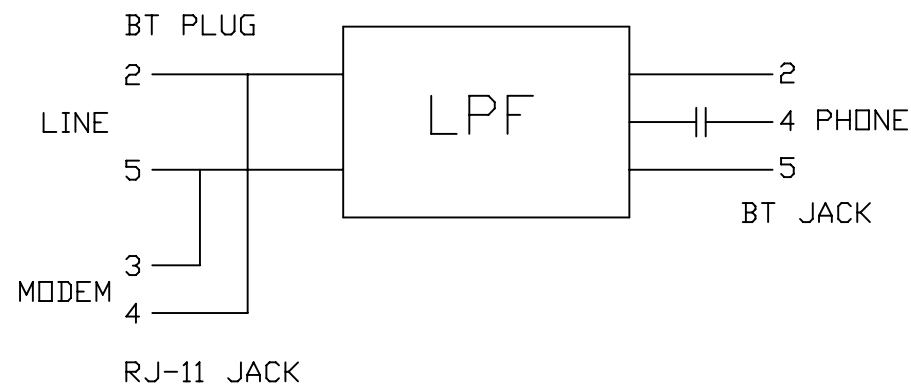


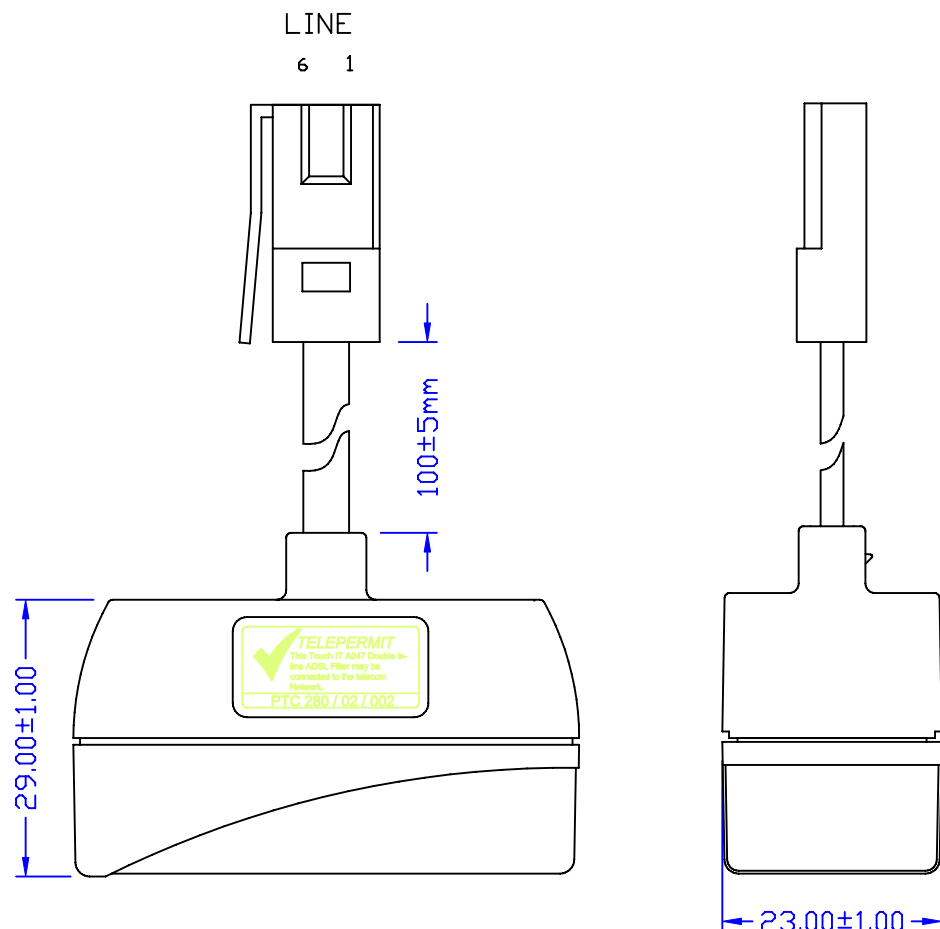

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS (@REF ZBT3, 300HZ-3.4KHZ) : 12dB MIN.
(@REF ZN, 300HZ-3.4KHZ) : 12dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.

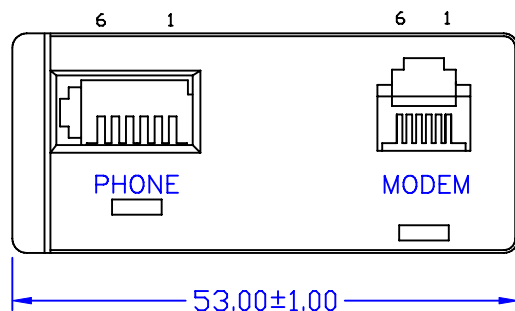

D	CHANGE LABEL DIRECTION	07/19/2007	PAIR	SEN	EUGENE	Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE MICRO FILTER FOR UK	
C	ADD LABEL	09/23/2003	RORY	AL	SUEDY		DWG. NO.	
B	PIN OUT	05/09/2003	RORY	AL	SUEDY		ATF047N1	
	RELEASE	10/08/2002	DOLLY	JEFF	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE		DRAW
REVISIONS						10/08/02		