
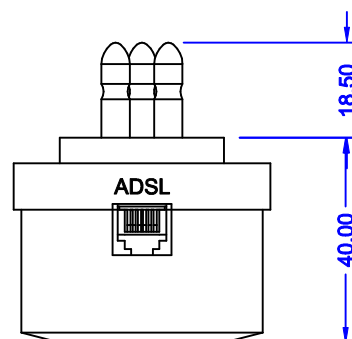
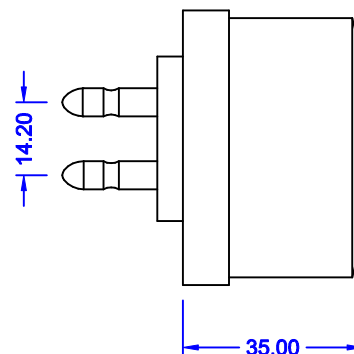
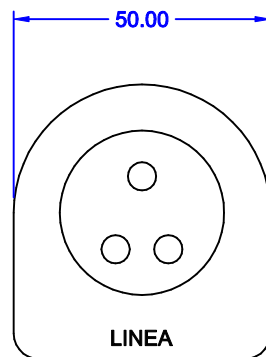


ELECTRICAL CHARACTERISTICS :

(POTS PORT IMPEDANCE : 270 OHM + 150nF // 750 OHM)

1. DCR : EACH LINE = 25 OHM MAX.
2. INSERTION LOSS : (@1KHz) = 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200Hz - 4KHz) = ± 1.1 dB
4. RETURN LOSS : (@300Hz - 500Hz) = 14dB MIN.
(@500Hz - 2KHz) = 18dB MIN.
(@2KHz - 3.4Hz) = 14dB MIN.
5. LONGITUDINAL BALANCE : (@200Hz - 3KHz) = 53dB MIN.
6. ATTENUATION : (@32KHz - 60KHz) = 15dB MIN.
(@60KHz - 200KHz) = 25dB MIN.

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-8867 FAX: (02)2794-8004		TITLE ITALY ADSL POTS SPLITTER	
								DWG. NO. ATF067	
	RELEASE	12/16/2003	RORY	SIMON	SUEBY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						12/16/03			