
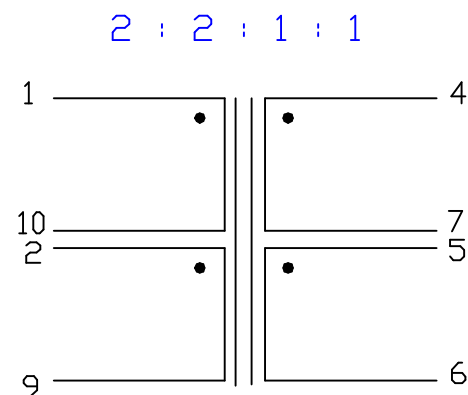
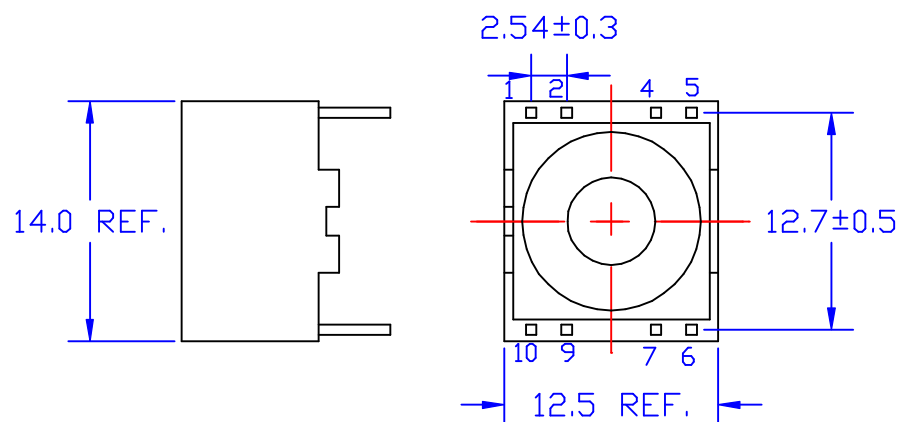
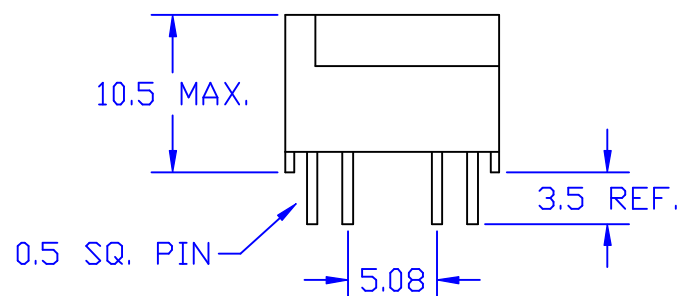


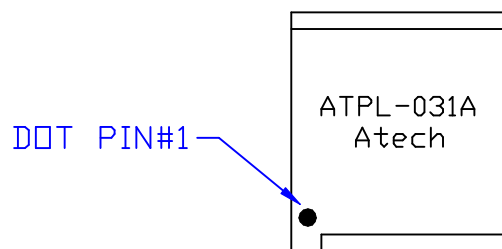

ELECTRICAL CHARACTERISTICS:

- D.C.R. : 1-10 = 2-9 = 2.5 Ω HM TYP.
5-6 = 4-7 = 0.75 Ω HM TYP.
- INDUCTANCE : (@10KHZ, 0.1Vrms, 5-7 SHORT)
4-6 = 30 mH MIN.
- LEACKAGE INDUCTANCE : (@100KHZ, 0.1Vrms, 5-7, 2-10, 1-9 SHORT)
4-6 = 5uH MAX.
- INTERWINDING CAP. : (@10KHZ, 0.1Vrms, 2-10, 5-7 SHORT)
1-4 = 110 PF MAX.
- TURNS RATIO : (@1KHZ, 1Vrms, 2-10, 5-7 SHORT)
1-9 : 4-6 = 2+/-1%
- HI-POT : (@1500VAC, 1mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)788-1958 FAX:(02)788-1960		TITLE ISDN-SQ TRANSFORMER	
								DWG. NO. ATPL-031A	
	RELEASE	05/10/2001	DOLLY		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						05/10/01		SHEET 1 OF 1	
								DRAW <i>Pair</i>	