
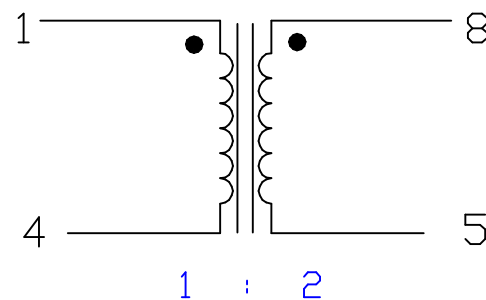
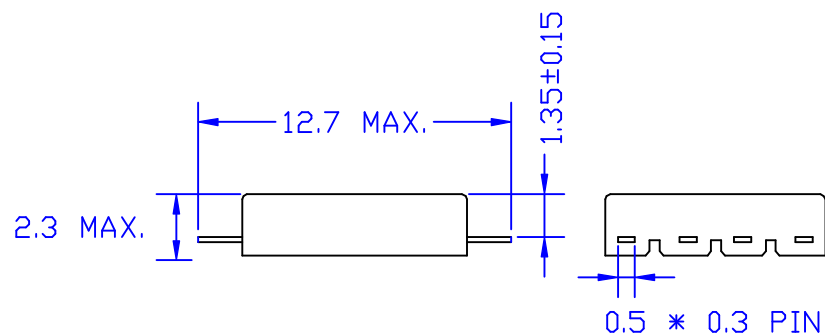


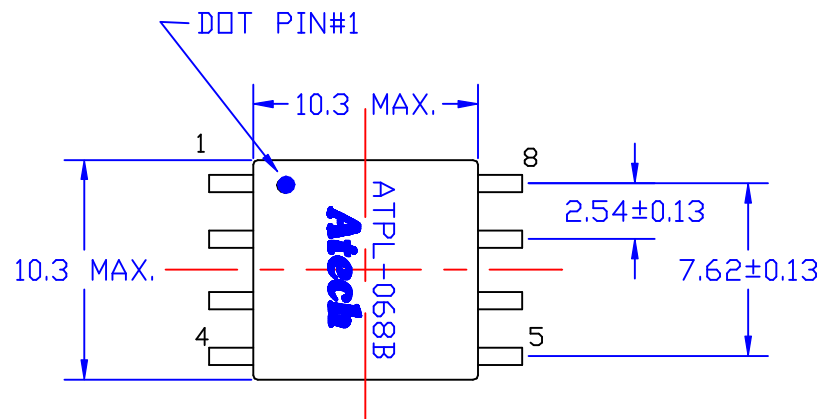

# ELECTRICAL CHARACTERISTICS:(835-00085 COMPATIBLE)

1. D.C.R. : PIN 1-4 = 200mΩHM MAX. PIN 5-8 = 160mΩHM MAX.
2. INDUCTANCE 9@100KHZ, 0.1 Vrms): PIN 1-4 = 23uH MIN.
3. TURNS RATIO (@100KHZ, 0.1Vrms):  
PIN 8-5 : PIN 1-4 = 2+/-5%
4. HI-POT (@2000VAC,1mA, 2SEC) PRI-SEC

|           |             |            |      |     |       |                                                                                                 |                                         |        |
|-----------|-------------|------------|------|-----|-------|-------------------------------------------------------------------------------------------------|-----------------------------------------|--------|
|           |             |            |      |     |       | <div><b>Atech®</b><br/>Atech Technology Co., Ltd.<br/>TEL:(02)2794-6667 FAX:(02)2794-8004</div> | TITLE 1 : 2<br>TRANSFORMER              |        |
|           |             |            |      |     |       |                                                                                                 | DWG. NO.<br>ATPL-068B                   |        |
|           | RELEASE     | 01/19/2001 | PAIR |     | SUEDY |                                                                                                 | UNITS:<br>M/M                           | SAFETY |
| NO.       | DESCRIPTION | DATE       | BY   | CHK | APPD  |                                                                                                 |                                         |        |
| REVISIONS |             |            |      |     |       | 01/19/01                                                                                        | SHEET 1 of 1<br><br>DRAW<br><i>Pair</i> |        |