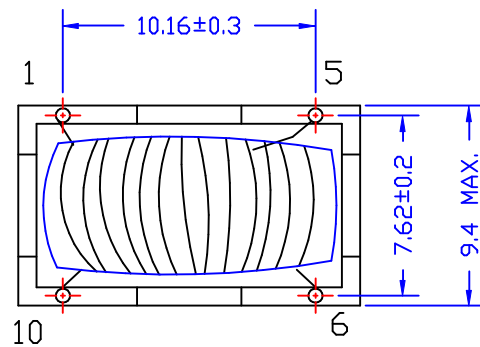
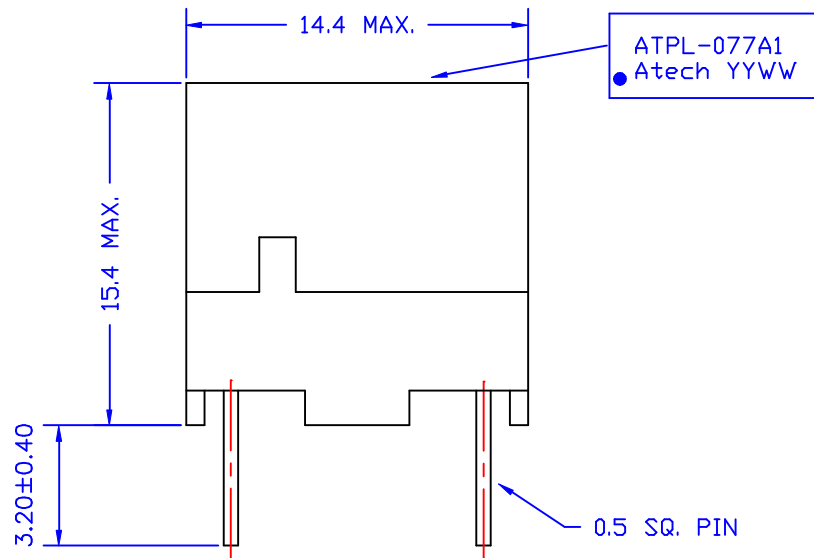


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-10 = 5-6 = 0.6 MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-10 = 5-6 = 6.5mH MIN.
PIN 10-6 (1-5 SHORT) = 1uH MAX.
- INDUCTANCE BAL. (@10KHz, 0.1Vrms) : L1 = 1-10 , L2 = 5-6
L1 - L2 = ±0.25mH
- TURN RATIO (@100KHz, 20mVrms) : PIN 1-10 : 5-6 = 1 ± 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-5

						Atech®		TITLE ADSL COMMON CHOKE
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:02)2794-6667 FAX:02)2794-8004		ATPL-077A1
A	CHANGE CAN	10/06 /2003	RORY	SUEDY	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	09/22 /2003	RORY	KEVIN	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						09/22/03		Pair