
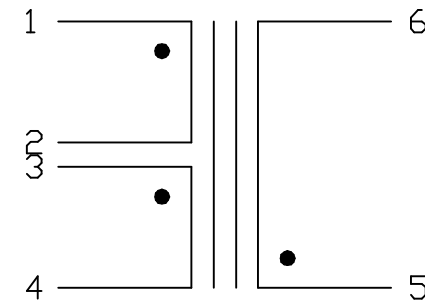


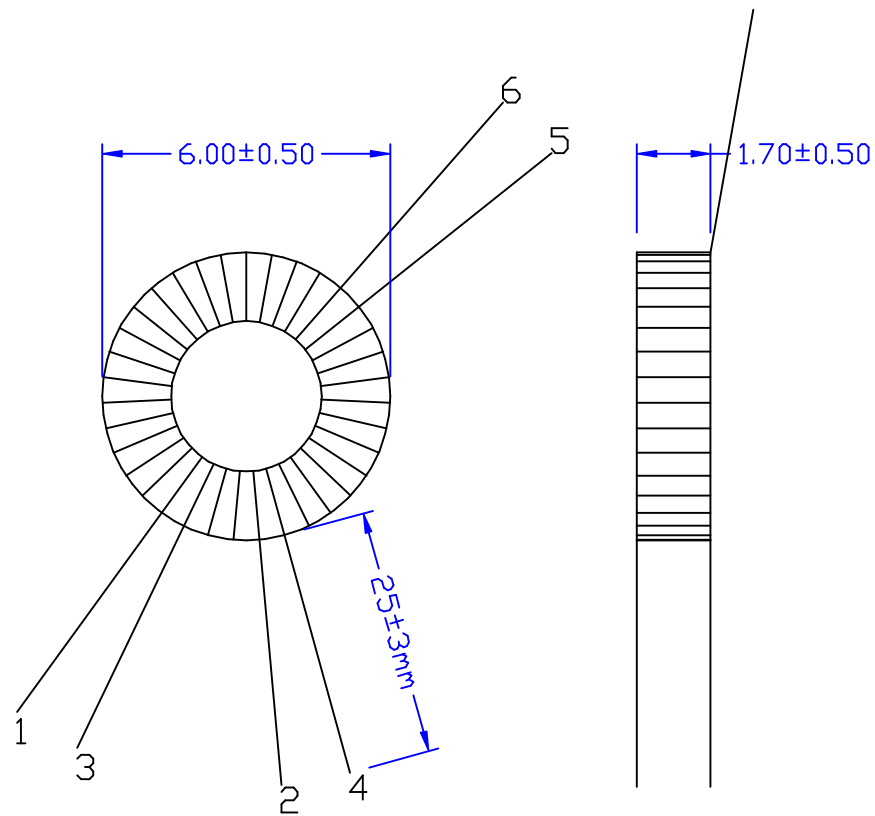

# ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 3-4 = 0.22 OHM MAX.  
PIN 5-6 = 0.33 OHM MAX.
- INDUCTANCE (@100KHZ, 0.01Vrms) : PIN 1-2 = 58uH ± 30%
- TURN RATIO (@1.2MHZ, 0.1Vrms) : PIN 1-2 : PIN 3-4 = 1 ± 1%  
PIN 5-6 : PIN 1-2 = 1.91 ± 1%
- HI-POT (@1000VAC, 1mA, 2SEC) : PIN 1-3, PIN 1-5

|           |             |            |       |       |       |                                                                               |                      |              |
|-----------|-------------|------------|-------|-------|-------|-------------------------------------------------------------------------------|----------------------|--------------|
|           |             |            |       |       |       | <b>Atech®</b><br>Atech Technology Co. Ltd.<br>TEL:022794-6667 FAX:022794-8084 | TITLE<br>TRANSFORMER |              |
|           |             |            |       |       |       |                                                                               | DWG. NO.<br>ATPL-152 |              |
|           | RELEASE     | 07/01/2002 | DOLLY | CPLIU | SUEDY | UNITS:<br>M/M                                                                 | SAFETY               | SHEET 1 OF 1 |
| NO.       | DESCRIPTION | DATE       | BY    | CHK   | APPD  | DATE<br>07/01/02                                                              |                      | DRAW<br>Pair |
| REVISIONS |             |            |       |       |       |                                                                               |                      |              |