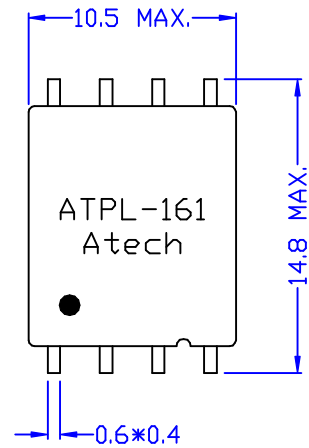


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 3-4 = 2 OHM TYP.
PIN 5-6 = 7-8 = 0.5 OHM TYP.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 5-8 (6-7 SHORT) = 30mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 5-8 (1-4 2-3 6-7 SHORT) = 5uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-8 (2-3 7-6 SHORT) = 120pF MAX.
- TURN RATIO (@15KHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 5-8 (7-6 SHORT) = 2.5 ± 10%
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI-SEC

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ISDN-So TRANSFORMER	
							DWG. NO. ATPL-161	
A	BASE.	07/30 /2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	01/22 /2002	DOLLY	JEFF	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	01/22/02		DRAW <i>Pair</i>
REVISIONS								