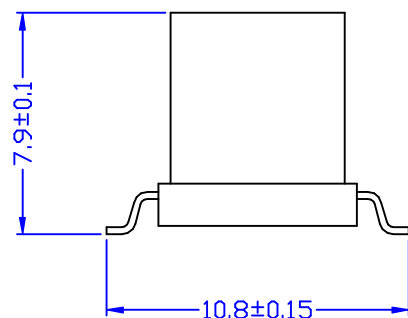
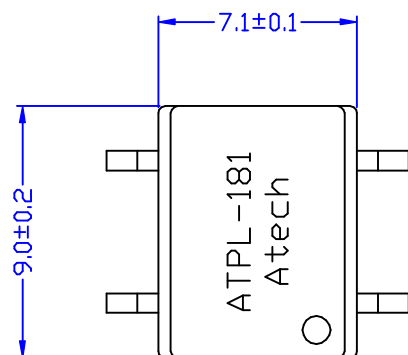


ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE : 50 OHM : 50 OHM
2. INSERTION LOSS (@50-100MHZ) : 6dB MAX.
3. FREQUENCY RESPONSE (@REF 14MHZ) : @3-25MHZ = $\pm 0.2\text{dB}$
4. TURN RATIO (@30KHZ, 0.1Vrms) : PIN 1-6 : PIN 3-4 = $1 \pm 5\%$
5. HI-POT (@3KVAC, 1mA, 1SEC) : PIN 1-3

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE RF TRANSFORMER	
								DWG. NO. ATPL-181	
A	PIN#2 & PIN#5	08/30/2002	DOLLY	JEFF	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	07/24/2002	DOLLY	JEFF	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						07/24/02		DRAW <i>Pair</i>	