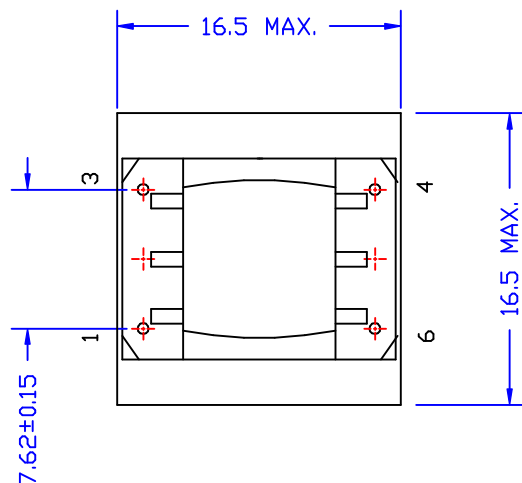
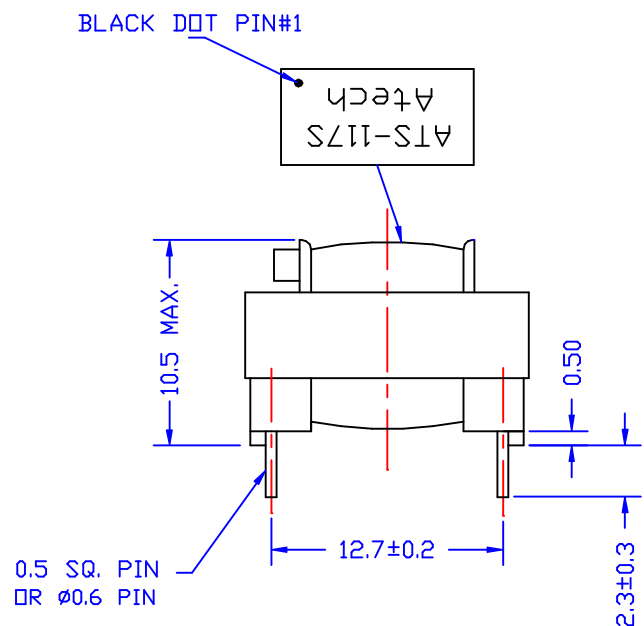


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 113 OHM $\pm$ 12%
PIN 6-4 = 113 OHM $\pm$ 12%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL) : PIN 1-3 = 17H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) PIN 1-3 = 2.1 $\pm$ 0.3dB
5. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = $\pm$ 0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO (9KHZ, 1Vrms) : PIN 1-3 : 6-4 = 1 $\pm$ 1%
8. DISTORTION : 150HZ, -3dBm : -75dB MAX.
300HZ, -10dBm : -75dB MAX.
9. HI-POT (@1250VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 374 TRANSFORMER	
							DWG. NO. ATS-117S	
	RELEASE	11/08/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						11/08/01	SHEET 1 OF 1 DRAW <i>Pair</i>	