
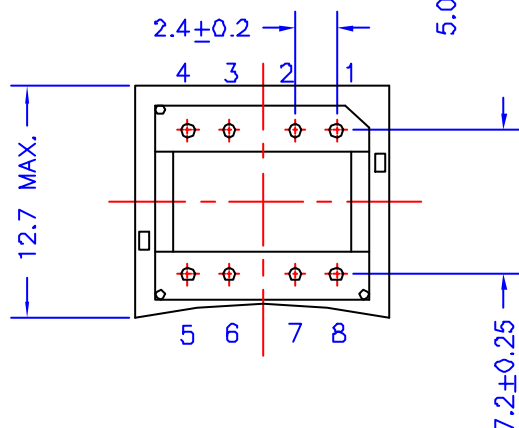
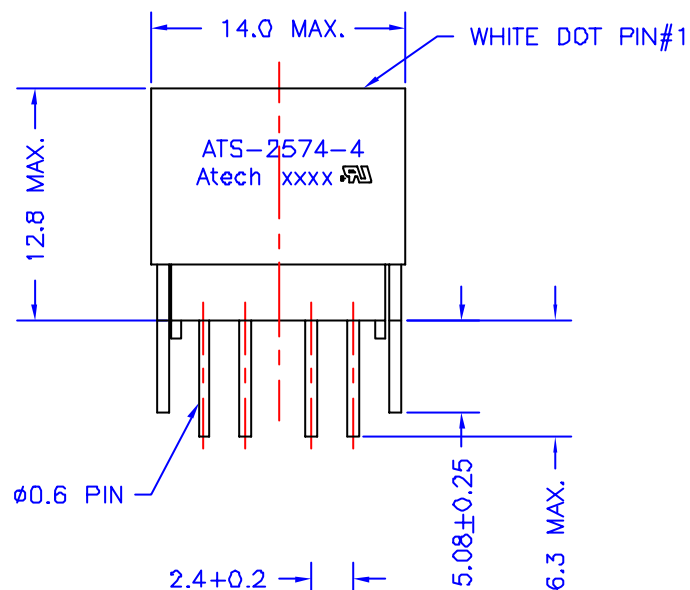


GRID
2.54 X 2.54

Ø1.5

Ø1.2

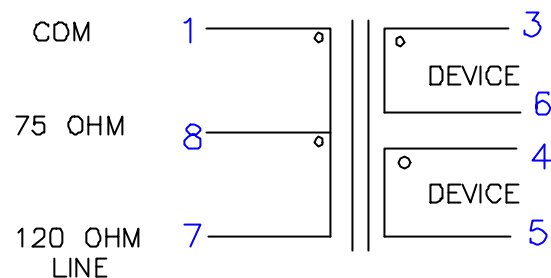

ELECTRICAL CHARACTERISTICS:

(FOR MITEL MT8976, MH89760, MH89761, MT8978, MH89780, MT8979, MH89790, MH 89791, T1/E1 INTERFACE)

- 1 D.C.R. : PIN 1-8 = 0.41 OHM+/-15% PIN 3-6 = 0.62 OHM+/-15%
PIN 4-5 = 0.62+/-15%
- 2 INDUCTANCE : PIN 1-8 = 1.2mH MIN.(@10KHZ, 1Vrms)
- 3 Q VALUE = 20 MIN.(@10KHZ, 200 mVrms)
- 4 TURN RATIO : PIN 1-8 : 3-6 : 4-5 = 1:1:1 ; 1-7 : 1-8 = 1.26 : 1
- 5 IMPEDANCE : @100KHZ, 300mVAC, PIN 3-6 W/H 75 OHM LOAD
PIN 1-8 = 75 OHM+/-10% PIN 1-7 = 120 OHM+/-10%
- 6 WINDING CAPACITANCE :(@10KHZ, 200mV) PIN 1-3 = 20 pf MAX.
PIN 3-4 = 80 pf MAX.
- 7 LOGITUDINAL BALANCE = 80 dB MIN. @4KHZ
- 8 LEKAGE INDUCTANCE : @10KHZ, 0.2VAC PIN 1-8 = 5uH MAX.
(PIN 3-4-5-6 SHORT)
- 9 HI-POT =(1500 VAC, 1mA 1MINUTE) PRI-SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL(02)2794-8667 FAX(02)2794-8004	TITLE T1/E1 TRANSFORMER	
							DWG. NO. ATS-2574-4	
RELEASE			PAIR		SLEJY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						08/12/93	E159603 	
							DRAW <i>Pair</i>	