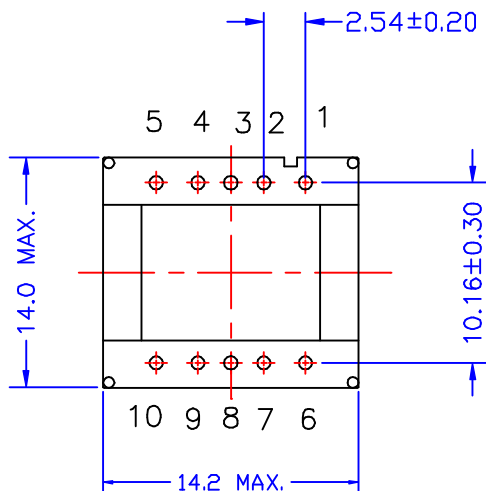
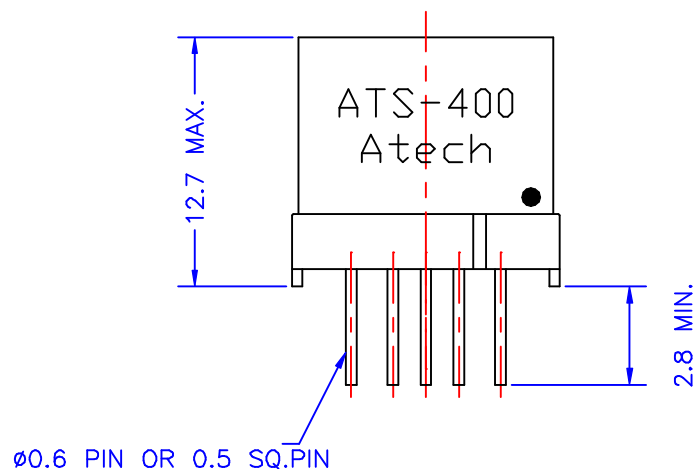


ELECTRICAL CHARACTERISTICS: (FOR DT32-2005 COMPATIBLE)

1. D.C.R. : PIN 1-7(2-6 SHORT)= 1.5 OHM MAX.
PIN 4-10(9-5 SHORT)= 1.7 OHM MAX.
2. INDUCTANCE:(@10KHZ, 0.1Vrms): 4-10(9-5 SHORT)= 25.5mH MIN.
3. LEAKAGE INDUCTANCE(@10KHZ, 1Vrms) 4-10(9-5,2-6,1-7 SHORT) = 15uH MAX.
4. INSERTION LOSS(@0dBm, 100 OHM LOAD) : @1KHZ = 0.5dB MAX.
@50KHZ = 0.5dB MAX.
@1MHZ = 1dB MAX.
5. FREQ. RESP(@REF 500KHZ) : (@1KHZ) = +/-1dB
(@1MHZ)= +/-1dB
6. INTERWINDING CAP.(@10KHZ, 1Vrms) : 4-1(9-5, 6-2, SHORT) = 40pF MAX.
7. TURN RATIO(@15KHZ, 1Vrms) : 4-10(9-5 SHORT) : 1-7(6-2 SHORT)
= 1+/-1%
8. HI-POT (@1500VAC, 1mA, 60SEC.) : PRI - SEC

						Atech®		TITLE ADSL TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-400
A	INDUCTANCE	04/18/2001	DOLLY		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	12/01/00	PAIR		SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						12/01/00		DRAW <i>Pair</i>