
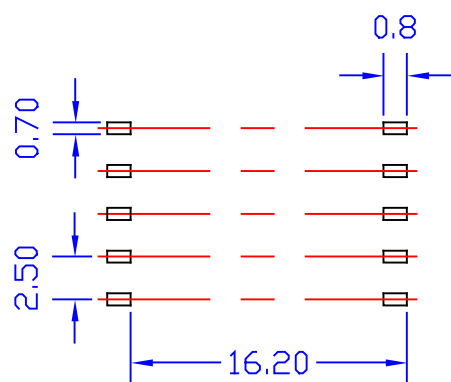
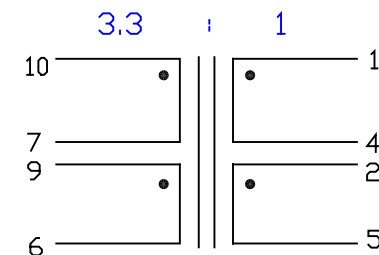
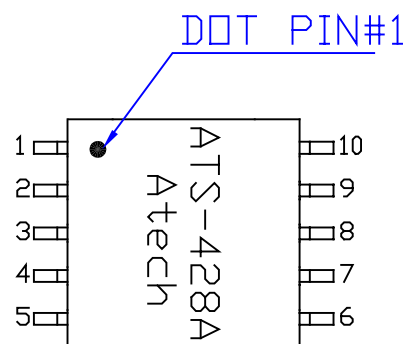
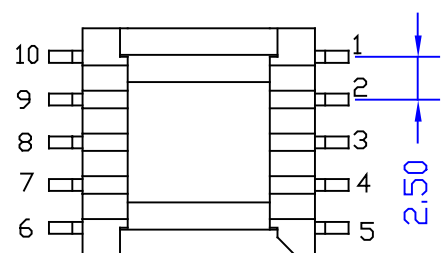



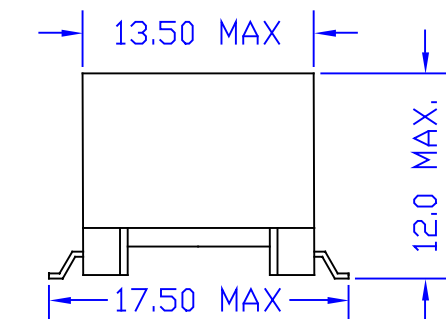

ELECTRICAL CHARACTERISTICS : (Meet IEC950/UL1950,36148 COMPATIBLE)

- PIN 1-4 = PIN 2-5 = 0.18 OHM MAX.
PIN 10-7 = PIN 9-6 = 0.774 OHM MAX.
- INDUCTANCE (@10 KHZ , 0.1 Vrms)
PIN 10-6 (7-9 SHORT) = 800 uH ±5%
- LEAKAGE INDUCTANCE (@100 KHZ , 0.1 Vrms)
PIN 10-6 (7-9 , 1-4-2-5 SHORT) = 15 uH MAX.
- INTERWINDING CAP. (@100 KHZ , 0.1 Vrms)
PRI-SEC = 65 PF MAX.
- URNS RATIO (@5 KHZ , 1 Vrms)
PIN 10-7-9-6 : PIN 1-4-2-5 = 3.33 ±1%
- LONGITUDINAL BAL. (@100 KHZ , 0 dBm) : 60 dB min.
- HI-POT(@1500 VAC , 1 mA , 1 MIN.) : PRI.-SEC.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE ADSL TRANSFORMER	
B	URNS RATIO	06/24/2004	BART	AL	SUEDY		DWG. NO. ATS-428A	
A	MARKING	08/07/00	DOLLY	CPLIU	SUEDY	UNITS: M/M		SHEET 1 OF 1
	RELEASE	08/21/00	FENG		SUEDY			
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/21/00		DRAW Pair
REVISIONS								