
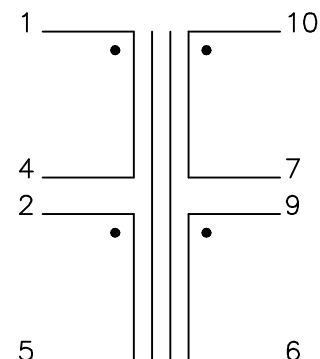




1. DCR : PIN 6-9 = 10-7 = 0.55 OHM MAX.
PIN 5-2 = 0.15 MAX.
PIN 4-1 = 0.1 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 (7-9 SHORT) = 800uH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-6 (2-4 1-5 7-9 SHORT) = 15uH MAX.
4. INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-10 (2-4 9-7 SHORT) = 45pF MAX.
5. TURN RATIO (@500KHZ, 1Vrms, 2-4 7-9 SHORT) : PIN 10-6 : 1-5 = 3.3 $\pm$ 1%
6. HI-POT (@4KVAC, 1mA, 1MIN) : PIN 1-10 (2-4 7-9 SHORT)

C	SPEC.	10/27/2003	PAIR	YEN	SUEDY	 Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	TRANSFORMER
B	DCR&TURN RATIO	09/10/2003	RORY	YEN	SUEDY		DWG. NO.	
A	DCR&TURN RATIO	08/25/2003	RORY	KEVIN	SUEDY			ATS-428
	RELEASE	07/31/2003	RORY	KEVIN	SUEDY	UNITS:	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
REVISIONS						DATE		DRAW
						07/31/03		Pair